
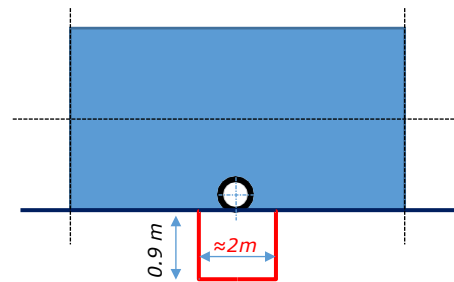



GENERAL CONDITIONS OF WORK OF THE SERVICING GROUP OF UPONOR INFRA Sp. z o.o.

Extrusion welding

1. The Client shall appoint a person responsible for contact with the servicing group of Uponor Infra sp. z o.o. at the building site and will ensure the presence of that person at the place of installation during the performance of the works.
2. The Client shall provide a person to supervise the safety of people working inside the tank / pipeline.
3. The Client shall send photos of the prepared construction site in accordance with the instructions provided in advance (at least 2 days before the planned arrival of the service group).
4. The Client undertakes to ensure safe work conditions for employees of Uponor Infra Sp. z o.o. in accordance with applicable law, and in particular appropriately prepare and protect the trenches according to the rules of occupational health and safety and fire protection for the purpose of safe execution of the works during the laying and installation of the pipes, manholes etc.
In the case of occurrence of a work accident because of the construction of the trench to the occupational health and safety regulations or incorrect protection of the trench, the Client will be liable for such incident.
5. Work involving the unloading, handling and correct positioning of pipes and prefabricated elements, necessary to perform the service, shall be on the part of the Client.
6. The Client shall dry the trench and secure it against collapse of the side walls at the site before the planned arrival of the servicing team and during the works. The above activities shall be performed by the Client at its own expense and on its own account.
7. The Client shall provide an installation hole min. 0.9 m in depth, 0.5 m in width and no less than 2 m in length in the trench, at the place of making connections of stub-pipes (so called "clips") of adjacent tanks by extrusion welding.

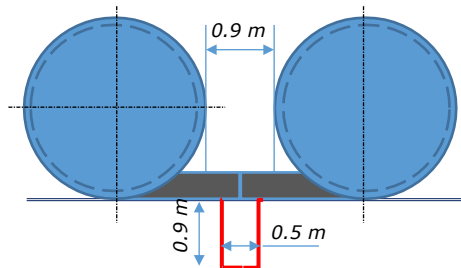

8. The Client should make an assembly pit with a depth of at least 0.9 m and a width equal to tank $d_e + 0.5$ m on each side of the assembly pit and a length of about 2 m in the trench, at the point where welds are made on the body of the tank. The Client may refrain from preparing the assembly pit after consulting the supplier's representative, depending on the soil and water conditions or the foundation under the tank.

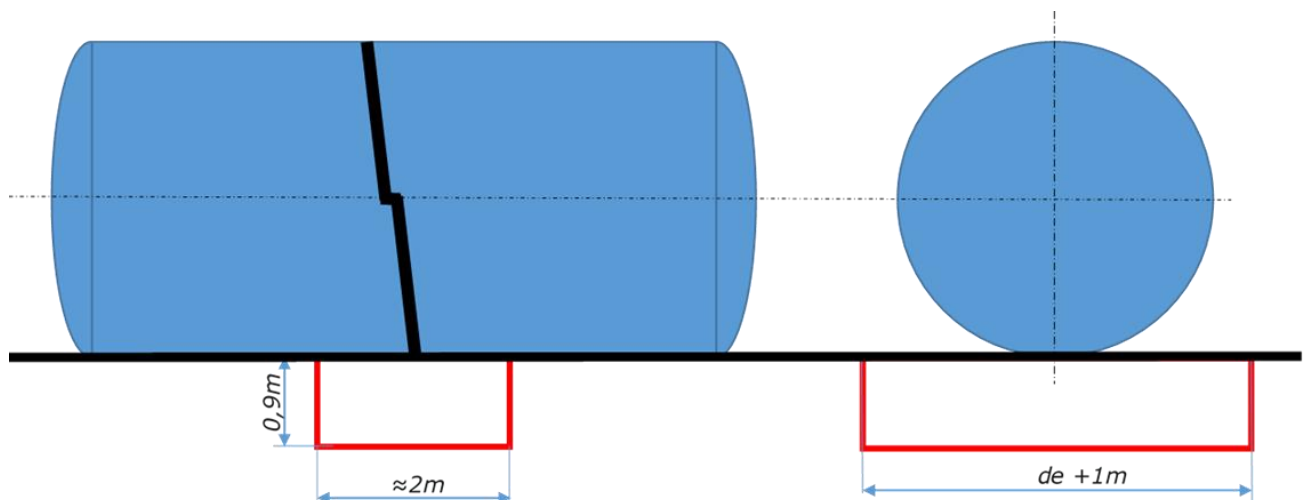

9. Service works related to the extension of rising pipes on the construction site may be performed according to one of the following methods:
 - welding the rising pipes before installing the tank in the trench - the tank is placed on a leveled ground outside the trench, on the side of the body (rotated by 90 degrees in relation to the foundation position), allowing safe access for the operator;
 - welding of rising pipes in a trench - a tank placed on a leveled ground in a prepared trench, on the side of the body (rotated by 90 degrees in relation to its foundation position), enabling safe operator access;
 - welding of rising pipes in the excavation, after foundation of the tank and execution of backfilling with compaction to the level of the tank top.

10. The Client shall provide free-of-charge additional equipment necessary for the execution of correct connection, specifically:
 - a) cranes enabling the movement of the welding machine and free movement of the sections of connected pipelines,
 - b) webbings and other lifting slings adapted to the transported elements in terms of the resistance and length, with a valid UDT certificate.
 - c) when scaffolding is used, assembly is on the side of UPONOR Infra Sp. z o.o. while receipt by the Client.

11. All costs related to the use of additional equipment, including personnel costs, shall be borne by the Client and shall not be reimbursed by Uponor Infra sp. z o.o. In case of failure to provide additional equipment necessary to perform the ordered works in a proper and timely manner, UponorInfra sp. z o.o. shall have the right to arrange such equipment on its own at the expense and risk of the Client, and any costs incurred in connection therewith shall be reimbursed by the Client within 7 days of being notified that such costs have been incurred.

12. Uponor Infra Sp. z o.o. reserves the right to make unannounced inspections of its employees during construction works.

13. The Client acknowledges that Uponor Infra Sp. z o. o. is responsible for the quality of the connections made exclusively by that company, i.e. when the employee of Uponor Infra Sp. z o. o. is the operator of the machine and when both connected materials are manufactured by Uponor Infra Sp. z o. o. and not by third parties.

The failure to meet all the aforementioned conditions will prevent the execution of the service by Uponor Infra Sp. z o.o. and will result in:

- **charging the Client with the costs of the arrival and shutdown of the servicing team;**
- **setting a new, feasible deadline for the implementation of works by Uponor Infra Sp. z o.o.;**
- **no liability of Uponor Infra Sp. z o.o. for delays caused to the Client, the Investor and third parties.**

The Client:
