


# Concealed sprinklers

## Project information

|                                |                 |
|--------------------------------|-----------------|
| Job name:                      | Location:       |
| Engineer:                      | Date submitted: |
| Contractor:                    | Submitted by:   |
| Manufacturer's representative: | Approved by:    |

## Technical data

|                         |                                     |
|-------------------------|-------------------------------------|
| Temp/pressure ratings   | 73 °F (23 °C) at 160 psi (11 bar)   |
|                         | 180 °F (82 °C) at 100 psi (6.9 bar) |
|                         | 200 °F (93 °C) at 80 psi (5.5 bar)  |
| Prop 65 label required? | Yes                                 |

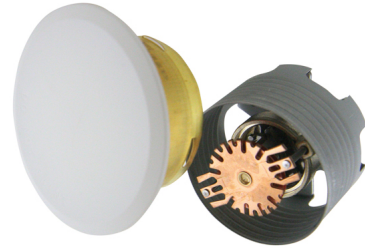

| Part name  | Part no.  | A [inch] | B [inch] | Material group | End Type 1 | End Type 2 | End Type 3 | Weight per UOM [lbs/UOM] |
|--|-----------|----------|----------|----------------|------------|------------|------------|--------------------------|
| LF RC-RES (162F) Flat Concealed Sprinkler                        | LF74970FC | -        | -        | -              | -          | -          | -          | 0.36                     |
| LF RC-RES (205F) Flat Concealed Sprinkler with White Cover Plate | LF74971FW | 0        | 0        | LF Brass       | ProPEX     | ProPEX     | FNPT       | 0.39                     |

## Installation

-

## Related applications

AquaSAFE™ Fire Safety Systems

## Footnotes

-

## Contact information

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517