

Uponor Aqua Pipe natural PN10 20x2,8 50m

1001201

- Operating pressure 10 bar
- Coil



Application information Uponor Aqua Pipe natural PN10

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Uponor Aqua Pipe natural PN10 20x2,8 50m

1001201

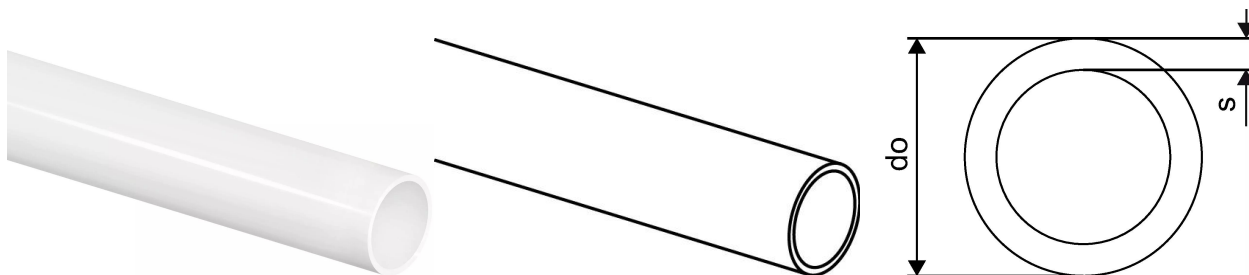

Technical data

Item no EAN	7321500018238
Item no GTIN	07321500018238
Item (unit of measurement)	m
Packaging Quantity 1	50
Packaging Quantity 4	550
Packaging GTIN PL1	06414905250646
Packaging GTIN PL4	06414905250660
Item Unit Length	1000
Item Unit Height	20
Item Unit Weight	0,154
Item Unit Width	20

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com