


## Uponor Minitec ring natural 9,9x1,1

1005263

- PE-Xa

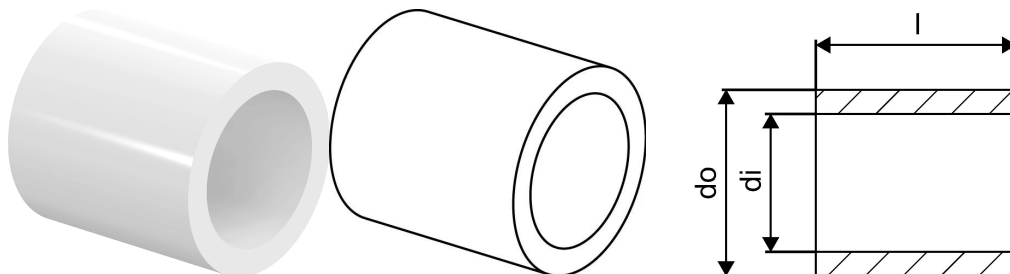

### Application information Uponor Minitec ring natural

#### Specification

- Minitec underfloor heating system for fixation on solid floors or specified insulation materials
- designed as sturdy pipe fixing system of minimum height, with integrated pipe laying channels for correct pipe laying distances
- for use with Uponor Minitec PE-Xa pipes 9.9 x 1.1 mm; allowing for straight and diagonal pipe laying
- EN 13501-1 fire classification: class E.
- standard flammability, building-material class B2, conforming to DIN 4102.
- Pipe spacing: Vz 5, 10, 15
- Net surface with overlapping nubs: 0,77m<sup>2</sup>

#### Application


- radiant underfloor heating and cooling
- very low construction height
- for use with qualified filler materials

#### Certification

- DIN CERTCO: 7F170-F

## Uponor Minitec ring natural 9,9x1,1

1005263

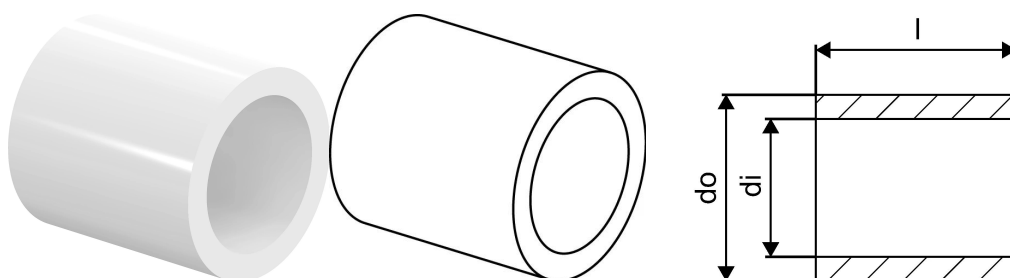

### Technical data

Item no EAN	7321500013981
Item no GTIN	07321500013981
Item no LVI	2072961
Item (unit of measurement)	pce
Length (l)	15 mm
Packaging Quantity 1	10
Packaging Quantity 3	1600
Packaging Quantity 4	57600
Packaging GTIN PL1	06414905251889
Packaging GTIN PL3	06414905251896
Packaging GTIN PL4	06414905251902
Item Unit Length	10
Item Unit Height	15
Item Unit Weight	0,001
Item Unit Width	10

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)