

## Uponor Radi Pipe natural in conduit red 16x2,0 25/20 50m

**1008388**

Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875


EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726

Application class 5 - high temperature radiators

Fire classification E according to DIN EN 13501-1.


Conduits manufactured from high density polyethylene

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Leakage free installations with possibility to exchange pipes in case of damage
- Operating pressure 6 bar
- Coils

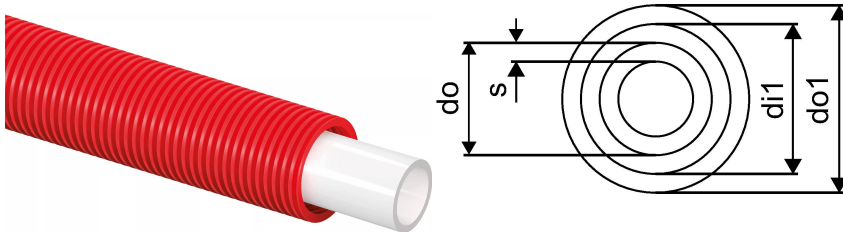

## Uponor Radi Pipe natural in conduit red 16x2,0 25/20 50m

1008388

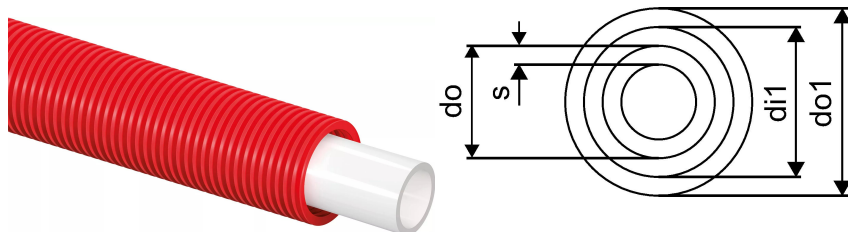

### Technical data

Item no EAN	7321500033385
Item no GTIN	07321500033385
Item no VVS	087232016
Item (unit of measurement)	m
Packaging Quantity 1	50
Packaging Quantity 4	550
Packaging GTIN PL1	06414905252565
Packaging GTIN PL4	06414905252572
Item Unit Length	1000
Item Unit Height	25
Item Unit Weight	0,156
Item Unit Width	25

#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)