


Uponor Radi Pipe natural PN6 S 63x5,8 6m

1008941

- Operating pressure 6 bar
- 6 m bars

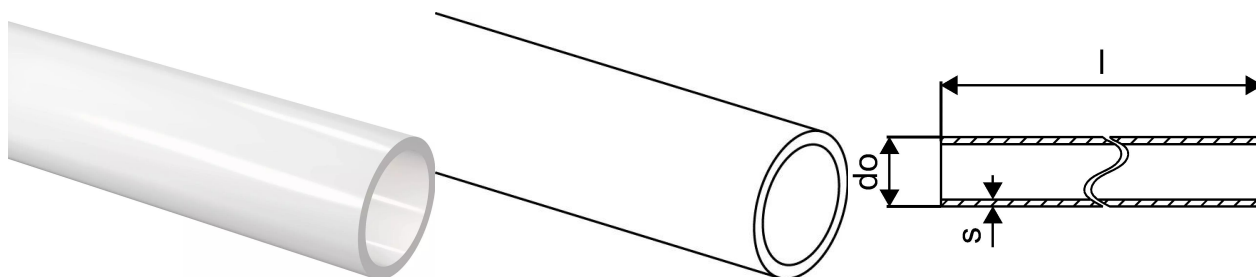

Application information Uponor Radi Pipe natural PN6 S

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 S 63x5,8 6m

1008941

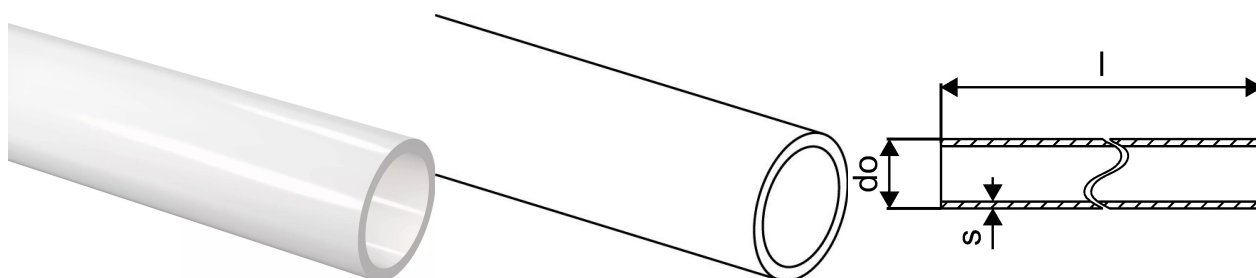

Technical data

Item no EAN	7321500018085
Item no GTIN	07321500018085
Item no VVS	087229163
RSK no.	2418235
Item (unit of measurement)	m
Packaging Quantity 1	6
Packaging Quantity 4	420
Packaging GTIN PL1	06414905422036
Packaging GTIN PL4	06414905662876
Item Unit Length	1000
Item Unit Height	63
Item Unit Weight	1,048
Item Unit Width	63

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com