


Uponor Radi Pipe natural PN6 40x3,7 100m

1008975

- Operating pressure 6 bar
- Coil

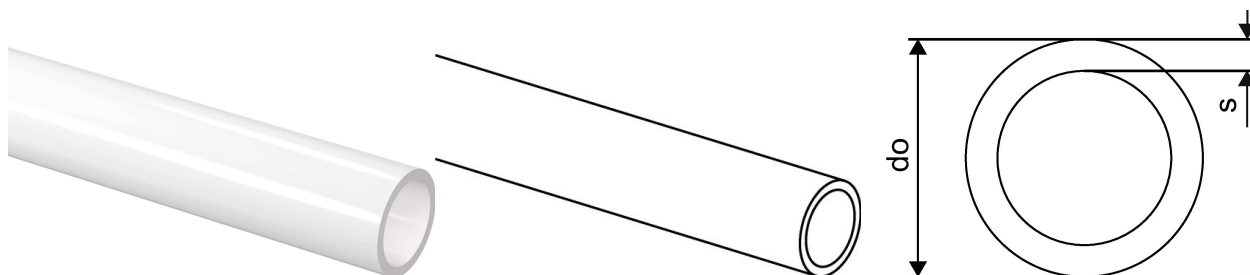

Application information Uponor Radi Pipe natural PN6

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Uponor Radi Pipe natural PN6 40x3,7 100m

1008975

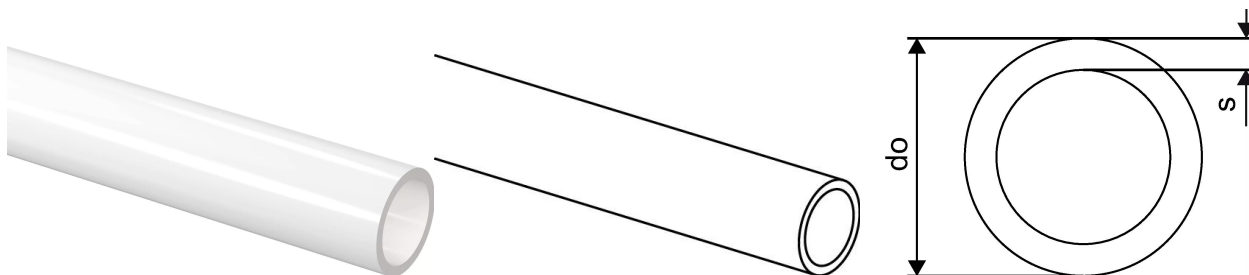

Technical data

Item no EAN	7321500018290
Item no GTIN	07321500018290
Item no VVS	087230140
RSK no.	2418016
Item no NRF	8362317
Item no LVI	2012141
Item (unit of measurement)	m
Packaging Quantity 1	100
Packaging Quantity 4	700
Packaging GTIN PL1	06414905255788
Packaging GTIN PL4	06414905255795
Item Unit Length	1000
Item Unit Height	40
Item Unit Weight	0,43
Item Unit Width	40

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com