


Uponor Smart Radi bend support 25/20mm

1009008

- Made of white plastic.
- For radiator connections from the floor with PE-Xa and MLC pipes in dimension 16.
- Dividable, for conduit 25/20 mm.
- Min. c/c 40 mm, including 5 mm distance.

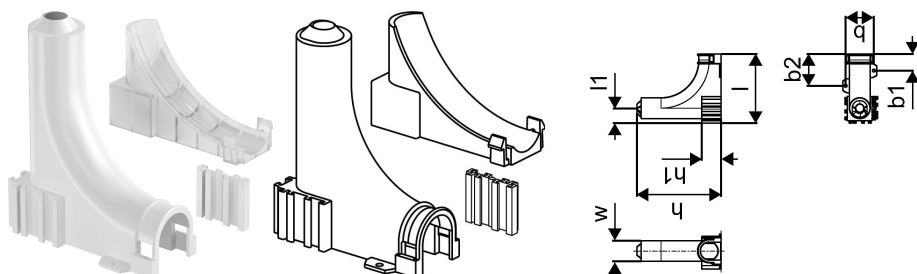

Application information Uponor Smart Radi bend support

Specification


- Fittings and accessories for radiator connection
- Q&E rings must be ordered separately if not different mentioned

Application

- Heating with high and with low tempertaure radiators

Uponor Smart Radi bend support 25/20mm

1009008

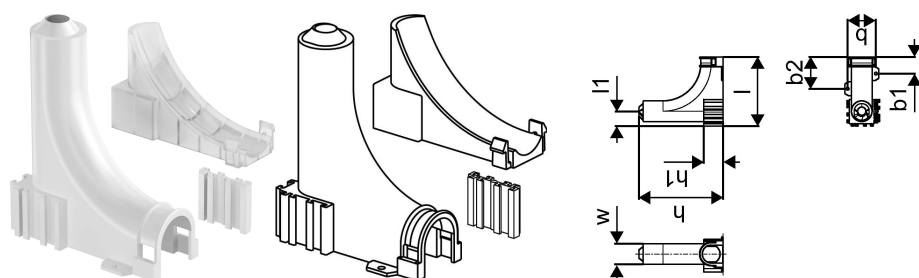

Technical data

Item no EAN	7321500022983
Item no GTIN	07321500022983
Item no VVS	087255125
RSK no.	1870155
Item no NRF	8362154
Item no LVI	2072085
Item (unit of measurement)	pce
Length (l)	100 mm
Length (l1)	21 mm
Z-measurement b	41 mm
Z-measurement b1	24 mm
Z-measurement b2	46 mm
Z-measurement h	122 mm
Z-measurement h1	28 mm
Z-measurement w	30 mm
Packaging Quantity 1	10
Packaging Quantity 4	750
Packaging Material short PL1	LDPE
Packaging Material PL1	Low density polyethylene
Packaging GTIN PL1	06414905434428
Packaging GTIN PL4	06414905488148
Item Unit Length	115
Item Unit Height	110
Item Unit Weight	0,06
Item Unit Width	35

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com