


Uponor Ecoflex Thermo mini 25x2,3/68

1018132

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- PEX foam, HDPE casing

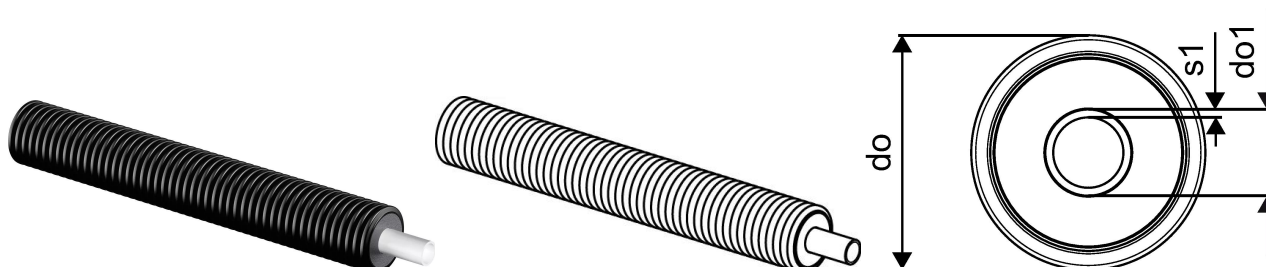

Application information Uponor Ecoflex Thermo mini

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) or PN 10 (SDR 7,4), Oxygen tightness based on EN 15632
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Thermo mini 25x2,3/68

1018132

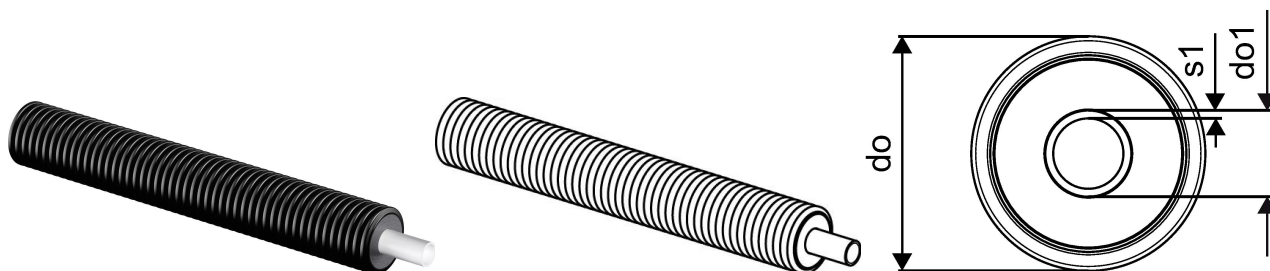

Technical data

| | |
|----------------------------|----------------|
| Item no EAN | 6414905203215 |
| Item no GTIN | 06414905203215 |
| Item (unit of measurement) | m |
| Bending radius 2 | 0,2 m |
| Packaging Quantity 1 | 200 |
| Packaging GTIN PL1 | 06414905437344 |
| Item Unit Length | 1000 |
| Item Unit Height | 68 |
| Item Unit Weight | 0,5 |
| Item Unit Width | 68 |

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com