


Uponor Ecoflex Thermo Twin 2x25x2,3/175

1018134

- Heating and Cooling
- Two medium pipes PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- Coloured centre profil to avoid confusion of flow and return line
- PEX foam, HDPE casing

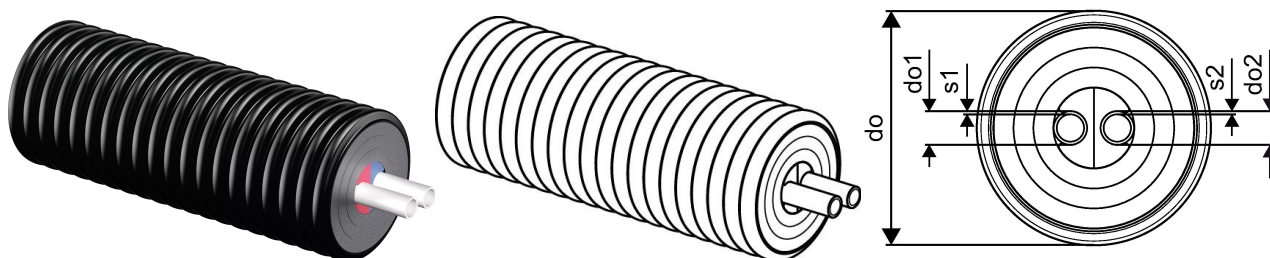

Application information Uponor Ecoflex Thermo Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) or PN 10 (SDR 7,4), Oxygen tightness based on EN 15632
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Thermo Twin 2x25x2,3/175

1018134

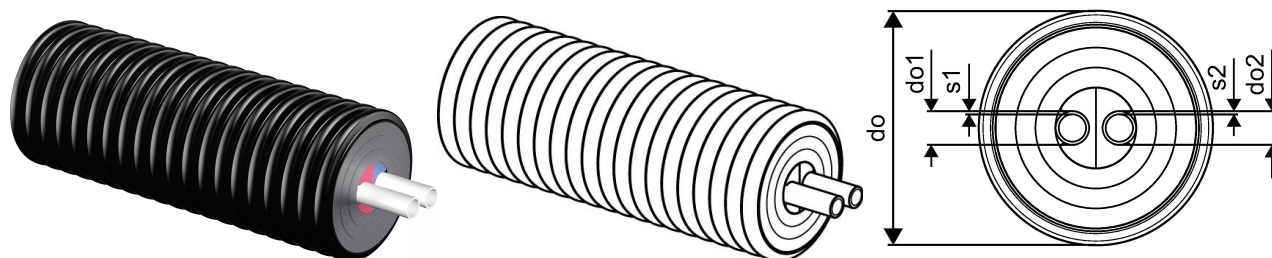

Technical data

Item no EAN	6414905210251
Item no GTIN	06414905210251
Item no VVS	087809025
RSK no.	2190561
Item no NRF	8360502
Item no LVI	3010232
Item (unit of measurement)	m
Bending radius 2	0,5 m
Packaging Quantity 1	200
Packaging GTIN PL1	06414905437368
Item Unit Length	1000
Item Unit Height	175
Item Unit Weight	1,92
Item Unit Width	175

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com