


Uponor Ecoflex Varia Single 110x10,0 /175

1018237

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 95°C
- PEX foam, HDPE casing

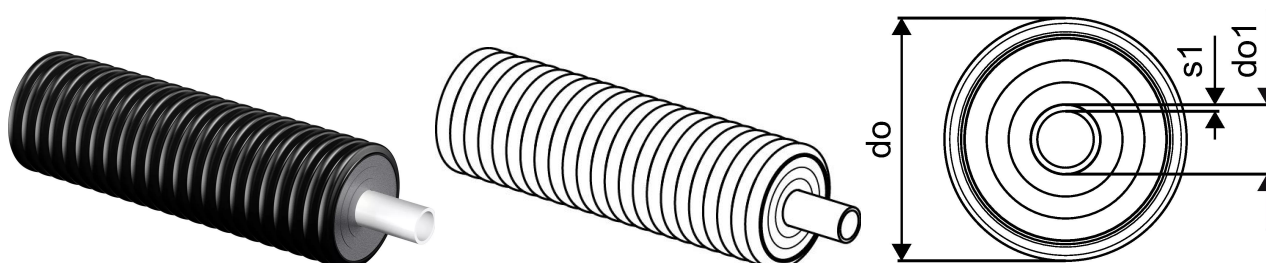

Application information Uponor Ecoflex Varia Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system produced based on EN 15632
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) or PN 10 (SDR 7,4), Oxygen tightness based on EN 15632
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application

- Transport of heating and cooling water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Varia Single 110x10,0 /175

1018237



Technical data

Item no EAN	4021598112001
Item no GTIN	04021598112001
Item no VVS	087807510
Item (unit of measurement)	m
Bending radius 2	0,9 m
Packaging Quantity 1	100
Packaging GTIN PL1	06414905437689
Item Unit Length	1000
Item Unit Height	110
Item Unit Weight	4,14
Item Unit Width	110

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com