


## Uponor Wipex coupling PN10 25x3,5-G1

**1018336**

- Connection of PE-Xa or PE pipe
- 10 bar, SDR 7,4
- Cylindric thread G" for O-ring sealing
- DR = dezincification resistance brass

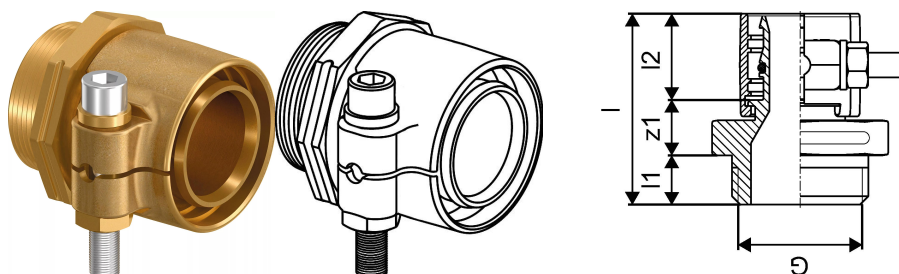

### Application information Uponor Wipex coupling PN10

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

## Uponor Wipex coupling PN10 25x3,5-G1

1018336

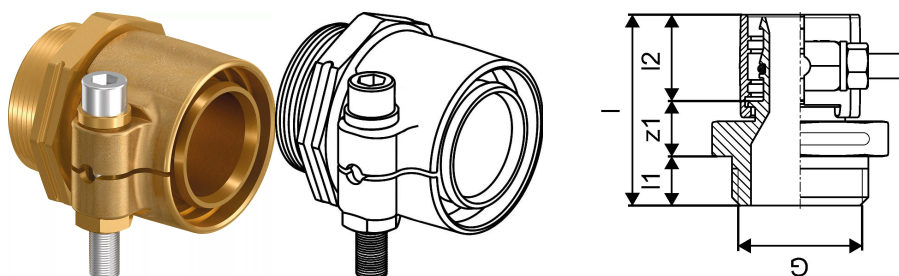

### Technical data

Item no EAN	7331541114080
Item no GTIN	07331541114080
Item no VVS	087883125
RSK no.	1883173
Item no NRF	5110029
Item no LVI	1932127
Item (unit of measurement)	pce
Length (l)	47 mm
Length (l1)	12 mm
Length (l2)	21 mm
Packaging Quantity 1	1
Packaging Quantity 3	40
Packaging Quantity 4	1440
Packaging GTIN PL1	06414905259854
Packaging GTIN PL3	06414905259861
Packaging GTIN PL4	06414905259878
Item Unit Length	47
Item Unit Height	46
Item Unit Weight	0,194
Item Unit Width	38

### Documents

Page with all documents



Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)