


Uponor Wipex coupling PN10 75x10,3-G2

1018342

- Connection of PE-Xa or PE pipe
- 10 bar, SDR 7,4
- Cylindric thread G" for O-ring sealing
- DR = dezincification resistance brass

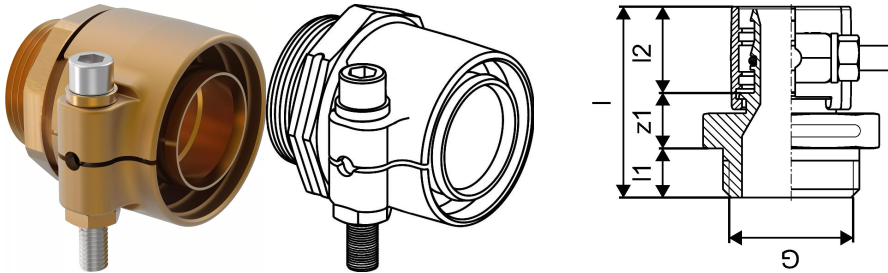

Application information Uponor Wipex coupling PN10

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex coupling PN10 75x10,3-G2

1018342

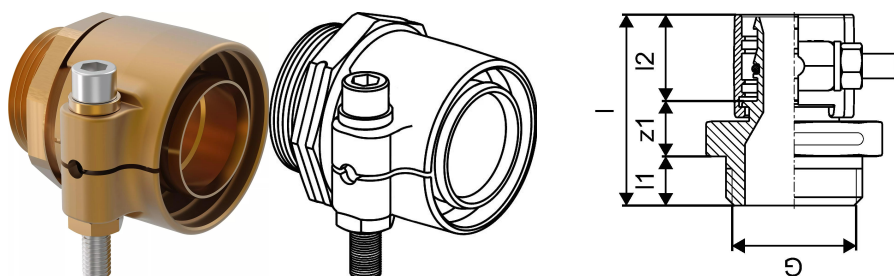

Technical data

Item no EAN	7331541100151
Item no GTIN	07331541100151
Item no VVS	087883175
RSK no.	2410677
Item no NRF	8360676
Item no LVI	1932175
Item (unit of measurement)	pce
Length (l)	92 mm
Length (l1)	20 mm
Length (l2)	51 mm
Packaging Quantity 1	1
Packaging Quantity 3	6
Packaging Quantity 4	288
Packaging GTIN PL1	06414905260010
Packaging GTIN PL3	06414905260027
Packaging GTIN PL4	06414905260034
Item Unit Length	100
Item Unit Height	94
Item Unit Weight	1,481
Item Unit Width	90

Documents

Page with all documents



Finland

T +358 (0)20 129 211

www.uponor.com