


Uponor Wipex coupling PN10 90x12,3-G3

1018343

- Connection of PE-Xa or PE pipe
- 10 bar, SDR 7,4
- Cylindric thread G" for O-ring sealing
- DR = dezincification resistance brass

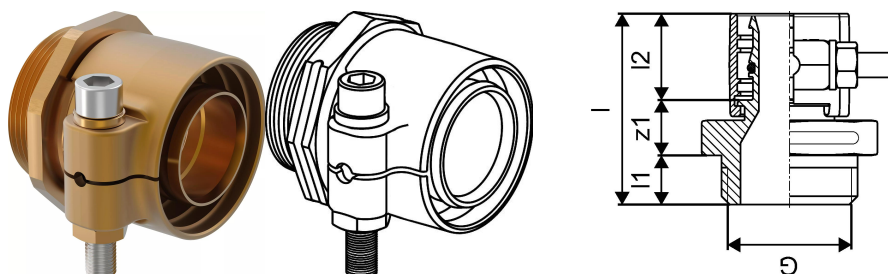

Application information Uponor Wipex coupling PN10

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex coupling PN10 90x12,3-G3

1018343

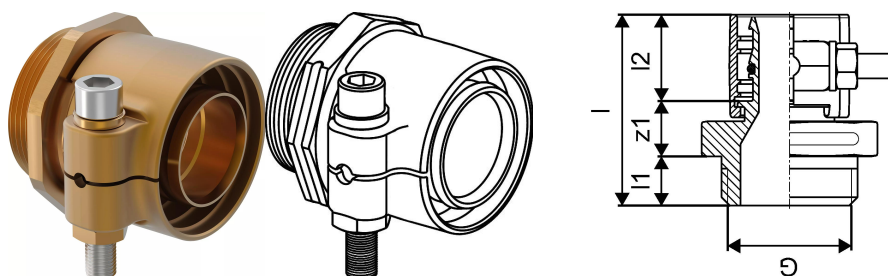

Technical data

Item no EAN	7331541100168
Item no GTIN	07331541100168
Item no VVS	087883190
RSK no.	2410678
Item no NRF	8360677
Item no LVI	1932182
Item (unit of measurement)	pce
Length (l)	105 mm
Length (l1)	24 mm
Length (l2)	59 mm
Packaging Quantity 1	1
Packaging Quantity 3	4
Packaging GTIN PL1	06414905480760
Packaging GTIN PL3	06414905480777
Item Unit Length	130
Item Unit Height	110
Item Unit Weight	2,503
Item Unit Width	110

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com