


## Uponor RS adapter S-Press 63-RS2

1029125

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts.

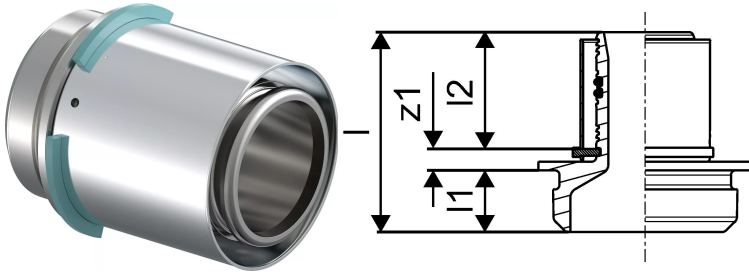

### Application information Uponor RS adapter S-Press

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS adapter S-Press 63-RS2

1029125

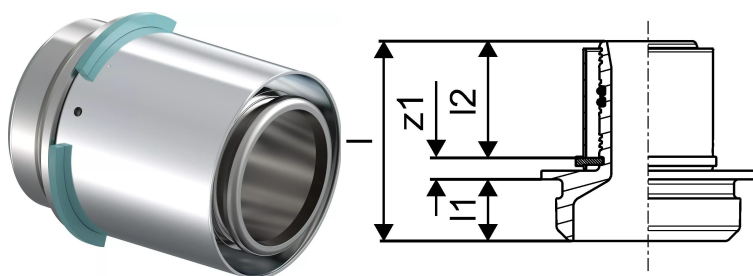

### Technical data

Item no EAN	4021598106628
Item no GTIN	04021598106628
Item no VVS	045450063
Item no NRF	5071233
Item (unit of measurement)	pce
Length (l)	88 mm
Length (l1)	20 mm
Length (l2)	61 mm
Packaging Quantity 1	1
Packaging Quantity 4	400
Packaging GTIN PL1	06414905263776
Packaging GTIN PL4	06414905263783
Item Unit Length	92
Item Unit Height	70
Item Unit Weight	0,57
Item Unit Width	70

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)