


Uponor RS adapter S-Press 75-RS2

1029126

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts.

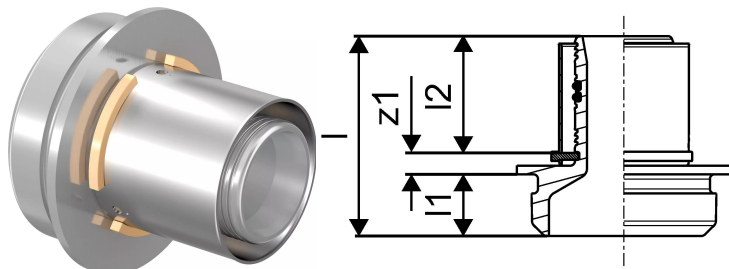

Application information Uponor RS adapter S-Press

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter S-Press 75-RS2

1029126

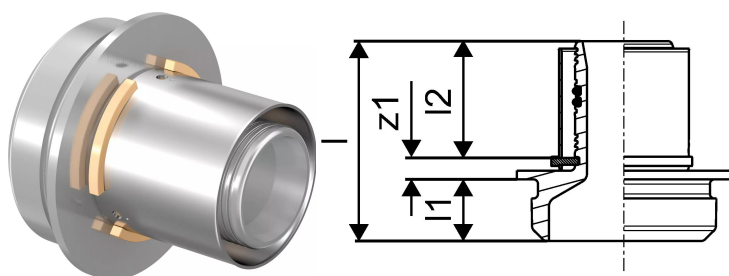

Technical data

Item no EAN	4021598106635
Item no GTIN	04021598106635
Item no VVS	045450075
RSK no.	1899488
Item no NRF	5071234
Item no LVI	1720823
Item (unit of measurement)	pce
Length (l)	88 mm
Length (l1)	20 mm
Length (l2)	61 mm
Packaging Quantity 1	1
Packaging Quantity 4	400
Packaging GTIN PL1	06414905439362
Packaging GTIN PL4	06414905491278
Item Unit Length	79
Item Unit Height	89
Item Unit Weight	0,767
Item Unit Width	79

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com