


## Uponor RS adapter S-Press 110-RS3

1029128

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts.

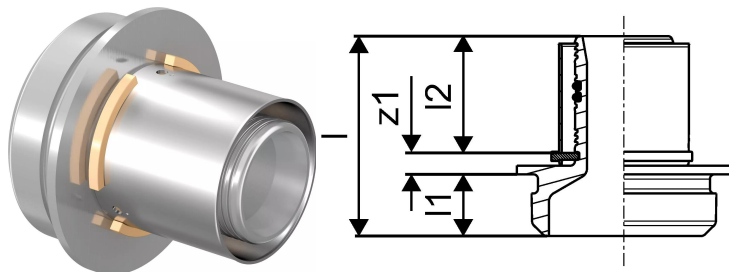

### Application information Uponor RS adapter S-Press

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS adapter S-Press 110-RS3

1029128

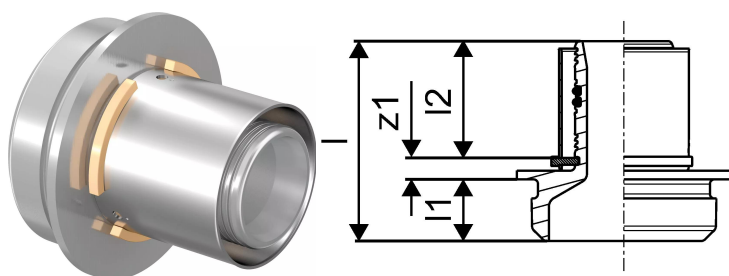

### Technical data

Item no EAN	4021598106659
Item no GTIN	04021598106659
Item no VVS	045450110
RSK no.	1899490
Item no NRF	5071236
Item no LVI	1720825
Item (unit of measurement)	pce
Length (l)	93 mm
Length (l1)	20 mm
Length (l2)	62 mm
Packaging Quantity 1	1
Packaging Quantity 4	240
Packaging GTIN PL1	06414905439386
Packaging GTIN PL4	06414905491292
Item Unit Length	94
Item Unit Height	120
Item Unit Weight	1,625
Item Unit Width	120

### Documents

Page with all documents

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)