


Uponor RS flange adapter RS3-DN80 (PN16)

1029129

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts
- Flange PN6/PN16 acc. to EN 1092-3
- Bolt circle with 4/8 holes.

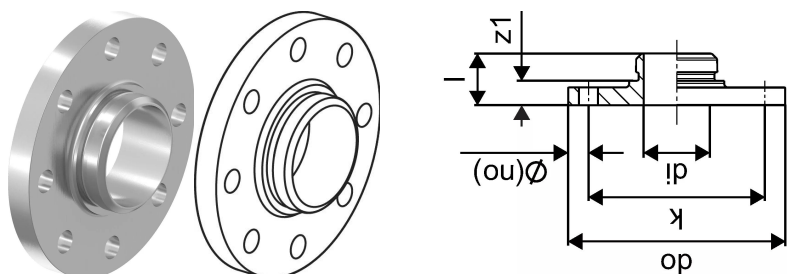

Application information Uponor RS flange adapter

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS flange adapter RS3-DN80 (PN16)

1029129



Technical data

Item no EAN	4021598106666
Item no GTIN	04021598106666
Item no VVS	045458080
RSK no.	1899498
Item no NRF	5071245
Item no LVI	1720833
Item (unit of measurement)	pce
Length (l)	45 mm
Z-measurement k	160 mm
Packaging Quantity 1	1
Packaging Quantity 4	90
Packaging GTIN PL1	06414905481323
Packaging GTIN PL4	06414905481330
Item Unit Length	200
Item Unit Height	46
Item Unit Weight	4,452
Item Unit Width	200

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com