


## Uponor RS adapter male thread R2 1/2"MT-RS2

**1029132**

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts

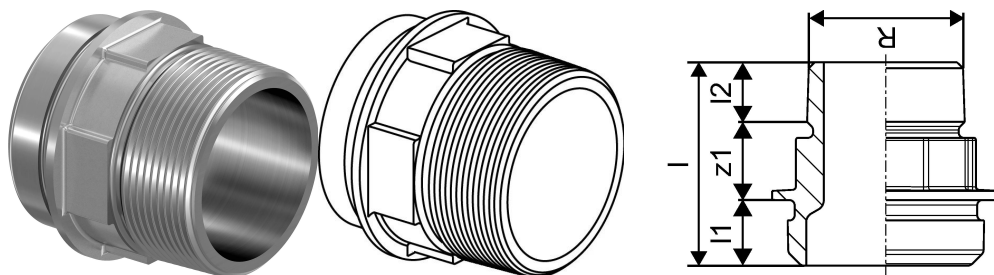

### Application information Uponor RS adapter male thread

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS adapter male thread R2 1/2"MT-RS2

1029132

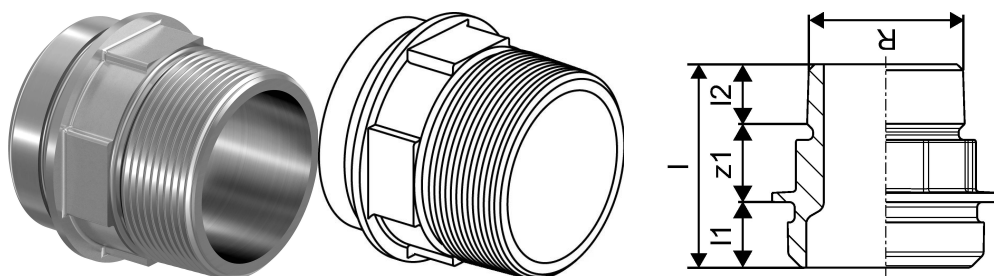

### Technical data

|                            |                |
|----------------------------|----------------|
| Item no EAN                | 4021598106697  |
| Item no GTIN               | 04021598106697 |
| Item no VVS                | 045451167      |
| RSK no.                    | 1899492        |
| Item no NRF                | 5071238        |
| Item no LVI                | 1720827        |
| Item (unit of measurement) | pce            |
| Length (l)                 | 63 mm          |
| Length (l1)                | 20 mm          |
| Length (l2)                | 27 mm          |
| Packaging Quantity 1       | 1              |
| Packaging Quantity 4       | 480            |
| Packaging GTIN PL1         | 06414905439416 |
| Packaging GTIN PL4         | 06414905491322 |
| Item Unit Length           | 74             |
| Item Unit Height           | 65             |
| Item Unit Weight           | 0,55           |
| Item Unit Width            | 74             |

### Documents

Page with all documents

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)