


Uponor RS adapter male thread R3"MT-RS3

1029133

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts

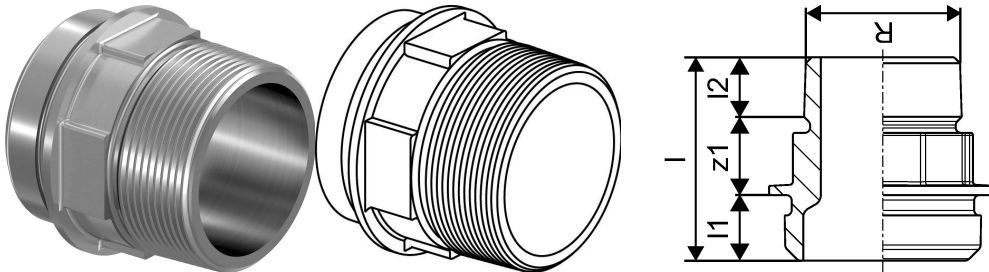

Application information Uponor RS adapter male thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter male thread R3"MT-RS3

1029133

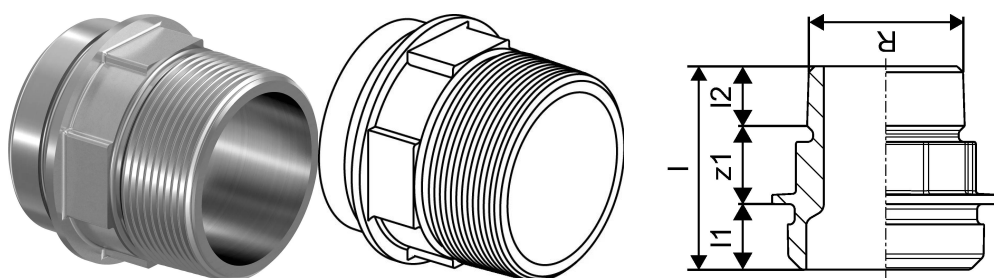

Technical data

Item no EAN	4021598106703
Item no GTIN	04021598106703
Item no VVS	045451114
RSK no.	1899493
Item no NRF	5071239
Item no LVI	1720828
Item (unit of measurement)	pce
Length (l)	73 mm
Length (l1)	20 mm
Length (l2)	30 mm
Packaging Quantity 1	1
Packaging Quantity 4	240
Packaging GTIN PL1	06414905523320
Packaging GTIN PL4	06414905523337
Item Unit Length	90
Item Unit Height	74
Item Unit Weight	0,826
Item Unit Width	90

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com