


## Uponor RS adapter female thread Rp1"FT-RS2

1029134

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

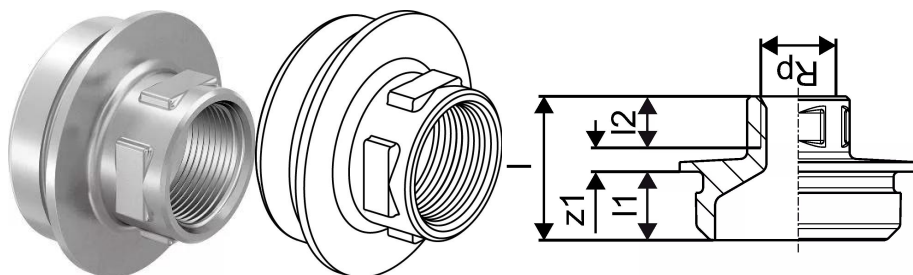

### Application information Uponor RS adapter female thread

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS adapter female thread Rp1"FT-RS2

1029134



### Technical data

Item no EAN	4021598106710
Item no GTIN	04021598106710
Item no VVS	045452165
RSK no.	1899494
Item no NRF	5071241
Item no LVI	1720829
Item (unit of measurement)	pce
Female thread Rp	1 inch
Length (l)	45 mm
Length (l1)	20 mm
Length (l2)	19 mm
Packaging Quantity 1	1
Packaging Quantity 4	480
Packaging GTIN PL1	06414905523306
Packaging GTIN PL4	06414905523313
Item Unit Length	64
Item Unit Height	45
Item Unit Weight	0,316
Item Unit Width	64

### Documents

Page with all documents



Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)