


Uponor RS adapter female thread Rp2"FT-RS2

1029135

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

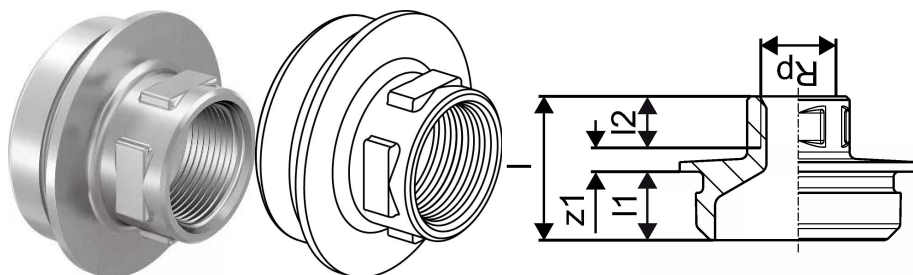

Application information Uponor RS adapter female thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter female thread Rp2"FT-RS2

1029135

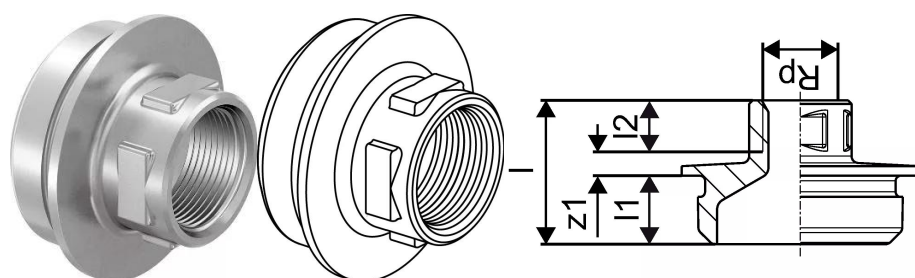

Technical data

Item no EAN	4021598106727
Item no GTIN	04021598106727
Item no VVS	045452112
RSK no.	1899495
Item no NRF	5071242
Item no LVI	1720830
Item (unit of measurement)	pce
Female thread Rp	2 inch
Length (l)	54 mm
Length (l1)	20 mm
Length (l2)	26 mm
Packaging Quantity 1	1
Packaging Quantity 4	480
Packaging GTIN PL1	06414905263837
Packaging GTIN PL4	06414905263844
Item Unit Length	67
Item Unit Height	57
Item Unit Weight	0,473
Item Unit Width	67

Documents

Page with all documents



Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com