


Uponor RS adapter female thread Rp3"FT-RS3

1029137

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

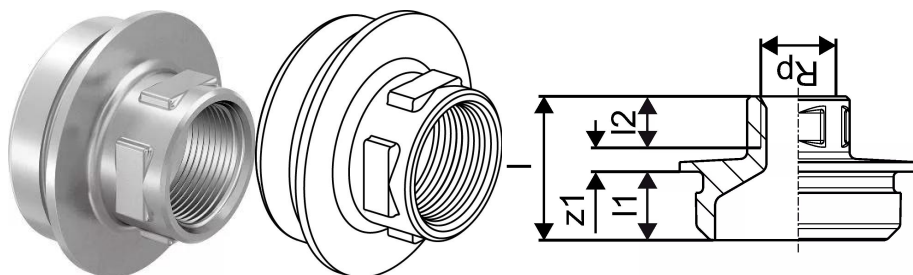

Application information Uponor RS adapter female thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS adapter female thread Rp3"FT-RS3

1029137

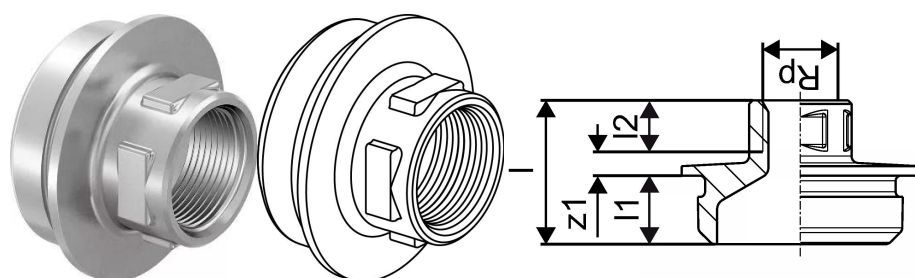

Technical data

Item no EAN	4021598106741
Item no GTIN	04021598106741
Item no VVS	045452114
RSK no.	1899497
Item no NRF	5071244
Item no LVI	1720832
Item (unit of measurement)	pce
Female thread Rp	3 inch
Length (l)	65 mm
Length (l1)	20 mm
Length (l2)	33 mm
Packaging Quantity 1	1
Packaging Quantity 4	240
Packaging GTIN PL1	06414905523375
Packaging GTIN PL4	06414905523382
Item Unit Length	65
Item Unit Height	93
Item Unit Weight	0,751
Item Unit Width	93

Documents

Page with all documents



Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com