


Uponor RS elbow RS2-RS2

1029138

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.

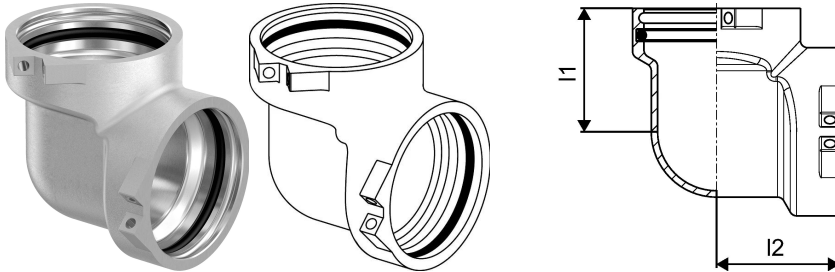

Application information Uponor RS elbow

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS elbow RS2-RS2

1029138

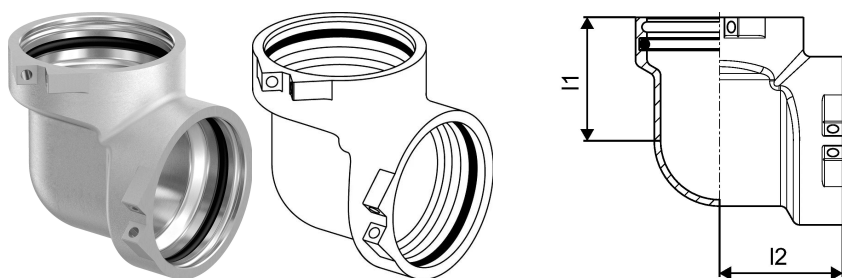

Technical data

Item no EAN	4021598106758
Item no GTIN	04021598106758
Item no VVS	045453112
RSK no.	1896578
Item no NRF	5071221
Item no LVI	1720811
Item (unit of measurement)	pce
Length (l1)	51 mm
Length (l2)	51 mm
Packaging Quantity 1	1
Packaging Quantity 4	336
Packaging GTIN PL1	06414905439454
Packaging GTIN PL4	06414905491360
Item Unit Length	84
Item Unit Height	69
Item Unit Weight	0,538
Item Unit Width	84

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com