


Uponor RS elbow RS3-RS3

1029139

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.

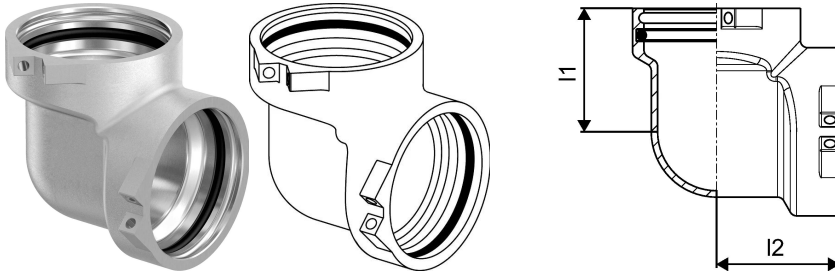

Application information Uponor RS elbow

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS elbow RS3-RS3

1029139

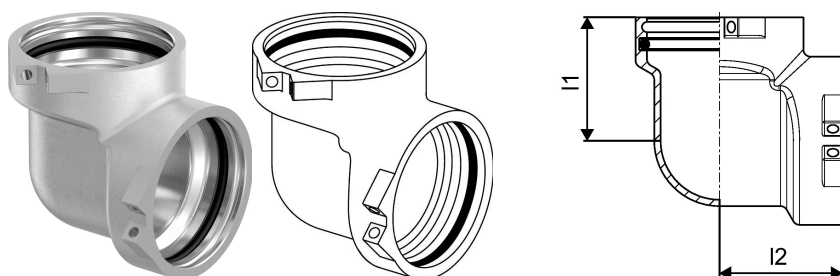

Technical data

Item no EAN	4021598106765
Item no GTIN	04021598106765
Item no VVS	045453114
RSK no.	1896579
Item no NRF	5071222
Item no LVI	1720812
Item (unit of measurement)	pce
Length (l1)	68 mm
Length (l2)	68 mm
Packaging Quantity 1	1
Packaging Quantity 4	240
Packaging GTIN PL1	06414905439461
Packaging GTIN PL4	06414905491377
Item Unit Length	118
Item Unit Height	100
Item Unit Weight	1,54
Item Unit Width	105

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com