


## Uponor RS elbow 45deg RS2-RS2

**1029140**

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.

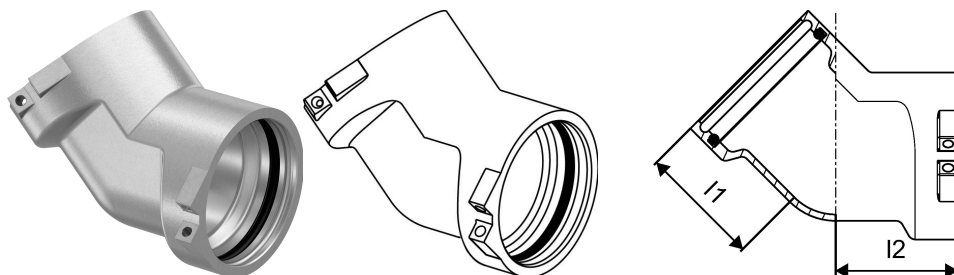

### Application information Uponor RS elbow 45deg

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS elbow 45deg RS2-RS2

1029140

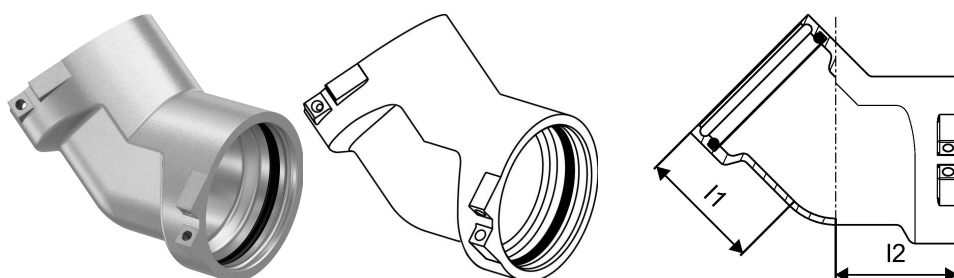

### Technical data

Item no EAN	4021598106772
Item no GTIN	04021598106772
Item no VVS	045454112
RSK no.	1896580
Item no NRF	5071223
Item no LVI	1720813
Item (unit of measurement)	pce
Length (l1)	51 mm
Length (l2)	51 mm
Packaging Quantity 1	1
Packaging Quantity 4	336
Packaging GTIN PL1	06414905439478
Packaging GTIN PL4	06414905491384
Item Unit Length	116
Item Unit Height	75
Item Unit Weight	0,682
Item Unit Width	90

### Documents

Page with all documents

#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)