


## Uponor RS elbow 45deg RS3-RS3

1029141

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.

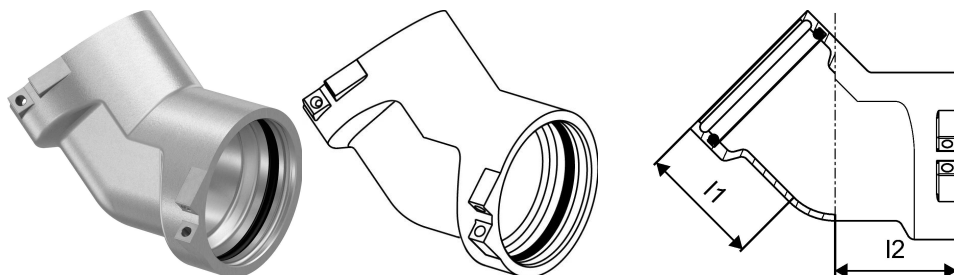

### Application information Uponor RS elbow 45deg

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS elbow 45deg RS3-RS3

1029141

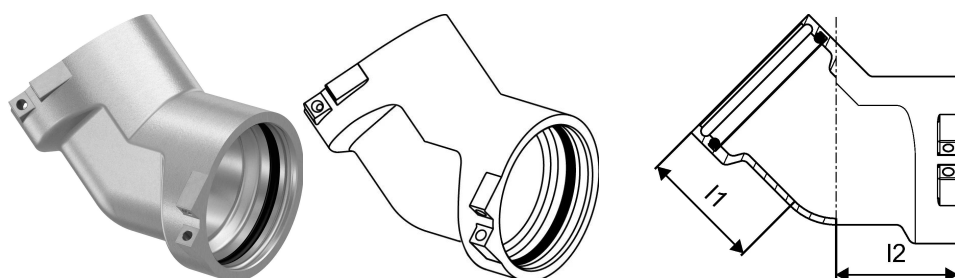

### Technical data

Item no EAN	4021598106789
Item no GTIN	04021598106789
Item no VVS	045454114
RSK no.	1896581
Item no NRF	5071224
Item no LVI	1720814
Item (unit of measurement)	pce
Length (l1)	68 mm
Length (l2)	68 mm
Packaging Quantity 1	1
Packaging Quantity 4	175
Packaging GTIN PL1	06414905439485
Packaging GTIN PL4	06414905491391
Item Unit Length	150
Item Unit Height	100
Item Unit Weight	1,93
Item Unit Width	100

### Documents

Page with all documents



#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)