


Uponor RS coupling RS3-RS3

1029145

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.

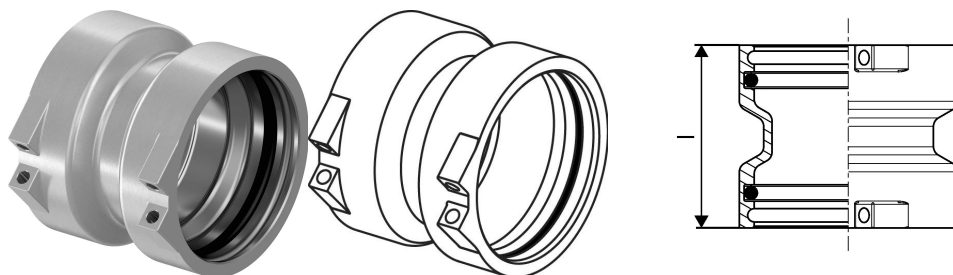

Application information Uponor RS coupling

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor RS coupling RS3-RS3

1029145

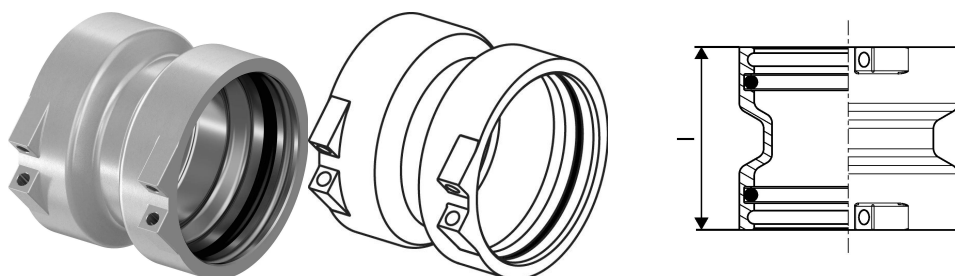

Technical data

Item no EAN	4021598106826
Item no GTIN	04021598106826
Item no VVS	045456114
RSK no.	1899481
Item no NRF	5071219
Item no LVI	1720810
Item (unit of measurement)	pce
Length (l)	58 mm
Packaging Quantity 1	1
Packaging Quantity 4	480
Packaging GTIN PL1	06414905439515
Packaging GTIN PL4	06414905491421
Item Unit Length	101
Item Unit Height	63
Item Unit Weight	0,73
Item Unit Width	101

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com