


## Uponor RS reducer RS3-RS2

**1029146**

- Made of tin-plated brass
- Reducer from RS3 to RS2 including 1 lock pin.

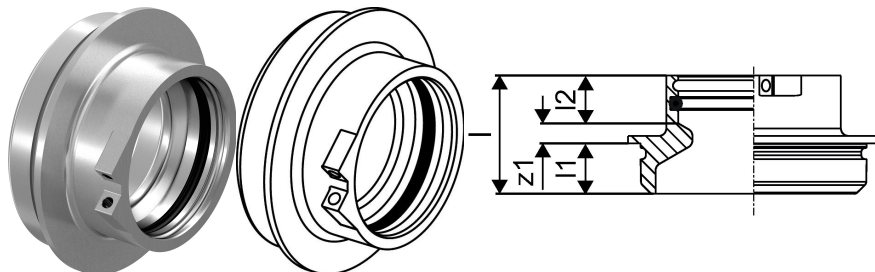

### Application information Uponor RS reducer

#### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:


- Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor RS reducer RS3-RS2

1029146

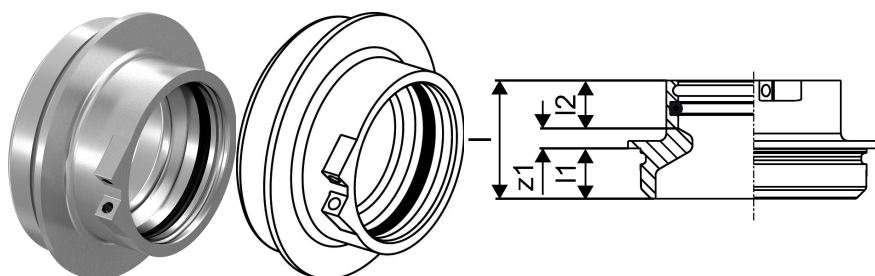

### Technical data

Item no EAN	4021598106833
Item no GTIN	04021598106833
Item no VVS	045456180
RSK no.	1899482
Item no NRF	5071227
Item no LVI	1720817
Item (unit of measurement)	pce
Length (l)	47 mm
Length (l1)	20 mm
Length (l2)	19 mm
Packaging Quantity 1	1
Packaging Quantity 4	480
Packaging GTIN PL1	06414905263875
Packaging GTIN PL4	06414905263882
Item Unit Length	100
Item Unit Height	47
Item Unit Weight	0,68
Item Unit Width	100

### Documents

Page with all documents



Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)