


Uponor S-Press elbow PPSU 63-63

1032877

- Fast installation with easy bevel and without calibration
- Colour code

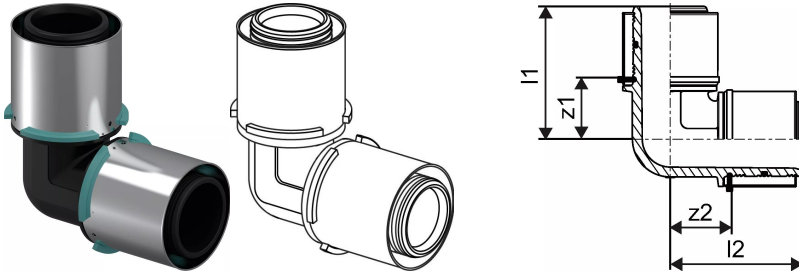

Application information Uponor S-Press elbow PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press elbow PPSU 63-63

1032877

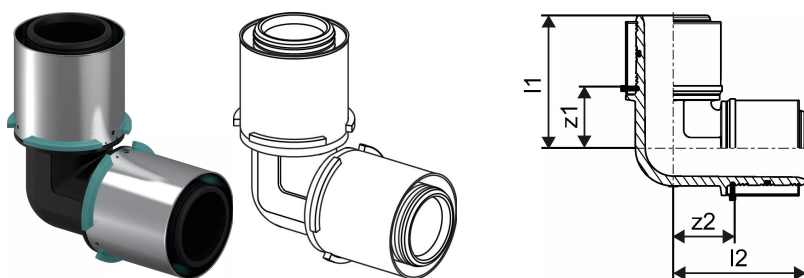

Technical data

Item no EAN	6414905220762
Item no GTIN	06414905220762
Item no VVS	087430163
RSK no.	1896573
Item no NRF	5114358
Item no LVI	1720102
Item (unit of measurement)	pce
Length (l1)	101 mm
Length (l2)	101 mm
Z-measurement z2	40 mm
Packaging Quantity 1	1
Packaging Quantity 4	210
Packaging GTIN PL1	06414905281107
Packaging GTIN PL4	06414905281114
Item Unit Length	139
Item Unit Height	72
Item Unit Weight	0,437
Item Unit Width	139

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com