


## Uponor S-Press elbow PPSU 75-75

**1032878**

- Fast installation with easy bevel and without calibration
- Colour code

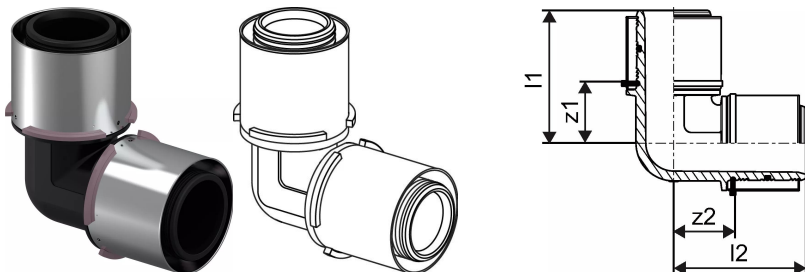

### Application information Uponor S-Press elbow PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor S-Press elbow PPSU 75-75

1032878

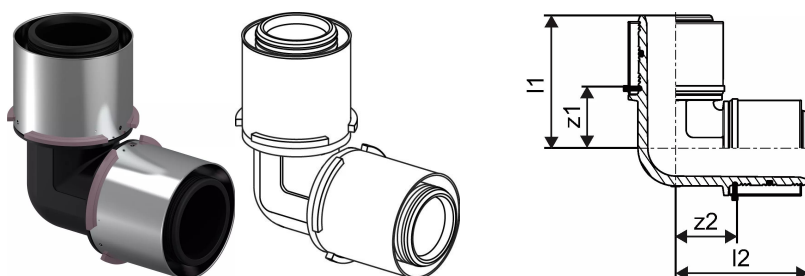

### Technical data

Item no EAN	6414905220779
Item no GTIN	06414905220779
Item no VVS	087430175
RSK no.	1896574
Item no NRF	5114359
Item no LVI	1720115
Item (unit of measurement)	pce
Length (l1)	108 mm
Length (l2)	108 mm
Z-measurement z2	47 mm
Packaging Quantity 1	1
Packaging Quantity 4	210
Packaging GTIN PL1	06414905281084
Packaging GTIN PL4	06414905281091
Item Unit Length	151
Item Unit Height	84
Item Unit Weight	0,625
Item Unit Width	151

### Documents

Page with all documents

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)