


Uponor S-Press reducer PPSU 63-40

1032883

- Fast installation with easy bevel and without calibration
- Colour code

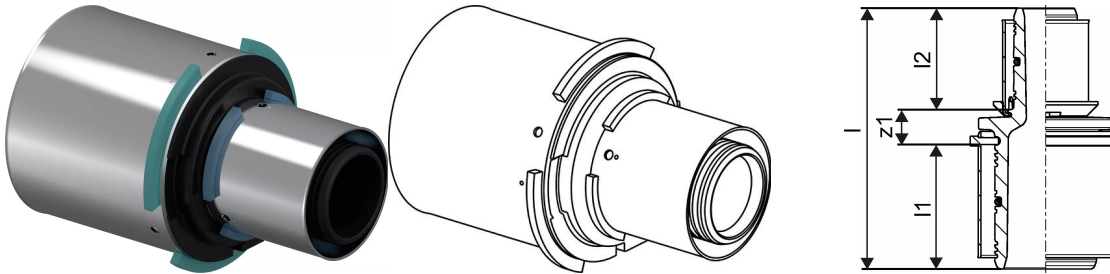

Application information Uponor S-Press reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press reducer PPSU 63-40

1032883

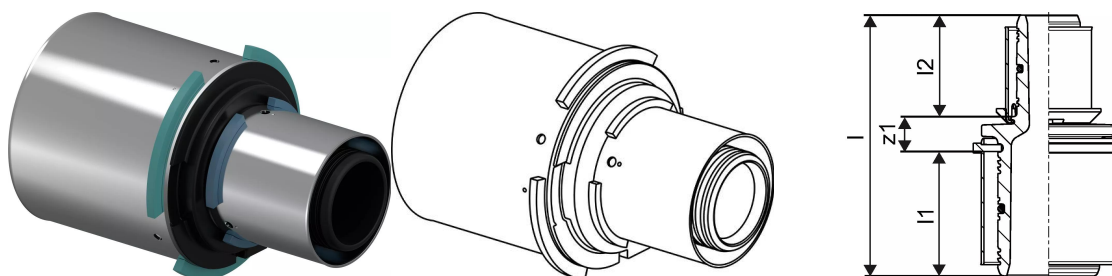

Technical data

Item no EAN	6414905220823
Item no GTIN	06414905220823
Item no VVS	087454163
RSK no.	1899462
Item no NRF	5114365
Item no LVI	1720120
Item (unit of measurement)	pce
Length (l)	115 mm
Length (l1)	61 mm
Length (l2)	37 mm
Packaging Quantity 1	1
Packaging Quantity 4	384
Packaging GTIN PL1	06414905281152
Packaging GTIN PL4	06414905281169
Item Unit Length	115
Item Unit Height	72
Item Unit Weight	0,235
Item Unit Width	72

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com