


Uponor S-Press reducer PPSU 75-50

1032885

- Fast installation with easy bevel and without calibration
- Colour code

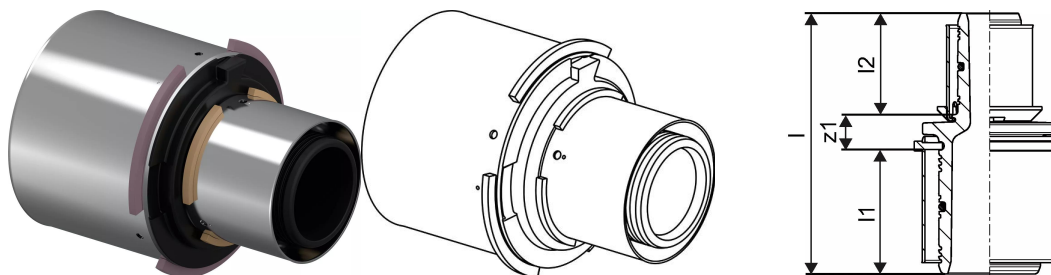

Application information Uponor S-Press reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

Uponor S-Press reducer PPSU 75-50

1032885

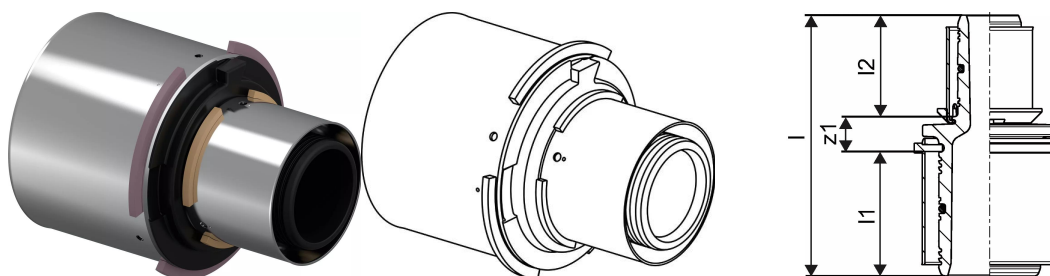

Technical data

Item no EAN	6414905220847
Item no GTIN	06414905220847
Item no VVS	087454175
RSK no.	1899464
Item no NRF	5114367
Item no LVI	1720122
Item (unit of measurement)	pce
Length (l)	115 mm
Length (l1)	61 mm
Length (l2)	37 mm
Packaging Quantity 1	1
Packaging Quantity 4	384
Packaging GTIN PL1	06414905281251
Packaging GTIN PL4	06414905281268
Item Unit Length	115
Item Unit Height	84
Item Unit Weight	0,323
Item Unit Width	84

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com