


Uponor Ecoflex wall through sealing 140

1034202

- For concrete-cast and brick walls
- Prevents moisture from entering the building
- Applicable for NWP = no pressurized water area

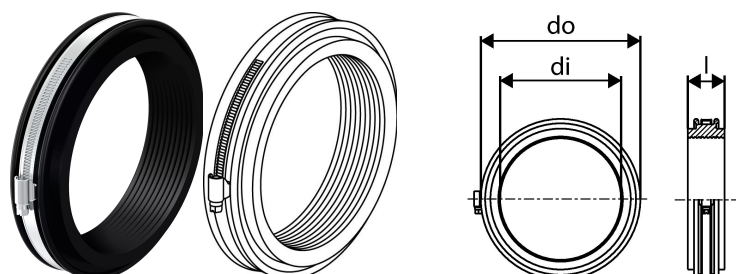

Application information Uponor Ecoflex wall through sealing

Specification

- All accessories are corrosion resistant.

Application


- Ecoflex accessories are designed to complete the assortment in buried installation.

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex wall through sealing 140

1034202

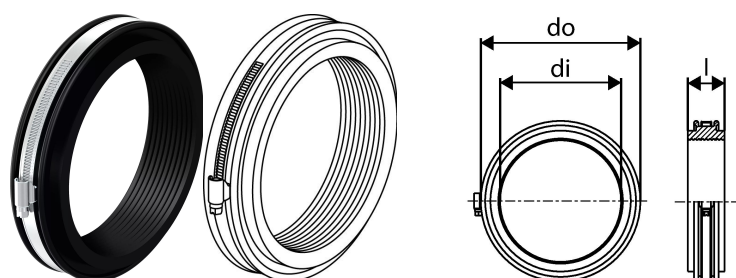

Technical data

Item no EAN	7321500038595
Item no GTIN	07321500038595
Item no VVS	087916314
RSK no.	4054775
Item no NRF	8360581
Item no LVI	3010647
Item (unit of measurement)	pce
Length (l)	40 mm
Packaging Quantity 1	1
Packaging Quantity 3	40
Packaging GTIN PL1	06414905266036
Packaging GTIN PL3	06414905266043
Item Unit Length	190
Item Unit Height	40
Item Unit Weight	0,360
Item Unit Width	190

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com