


Uponor S-Press PLUS elbow PPSU 16-16

1039929

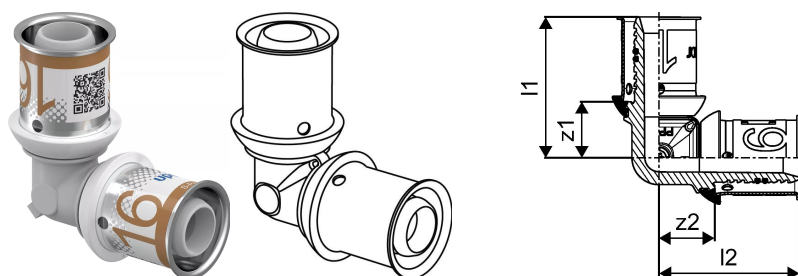

Application information Uponor S-Press PLUS elbow PPSU

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

Uponor S-Press PLUS elbow PPSU 16-16

1039929

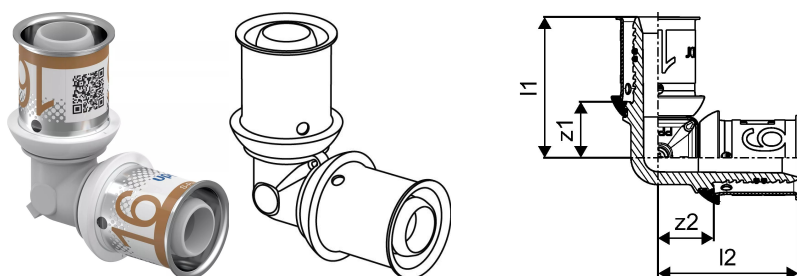

Technical data

Item no EAN	6414905228683
Item no GTIN	06414905228683
Item no VVS	087430116
RSK no.	1896525
Item no NRF	5114381
Item no LVI	1720686
Item (unit of measurement)	pce
Length (l1)	33 mm
Length (l2)	33 mm
Z-measurement z2	13 mm
Packaging Quantity 1	20
Packaging Quantity 3	80
Packaging Quantity 4	7680
Packaging GTIN PL1	06414905634873
Packaging GTIN PL3	06414905425488
Packaging GTIN PL4	06414905289424
Item Unit Length	44
Item Unit Height	44
Item Unit Weight	0,01704
Item Unit Width	22

Documents

Page with all documents



Finland

T +358 (0)20 129 211

www.uponor.com