


Uponor S-Press reducer PPSU 40-32

1039942

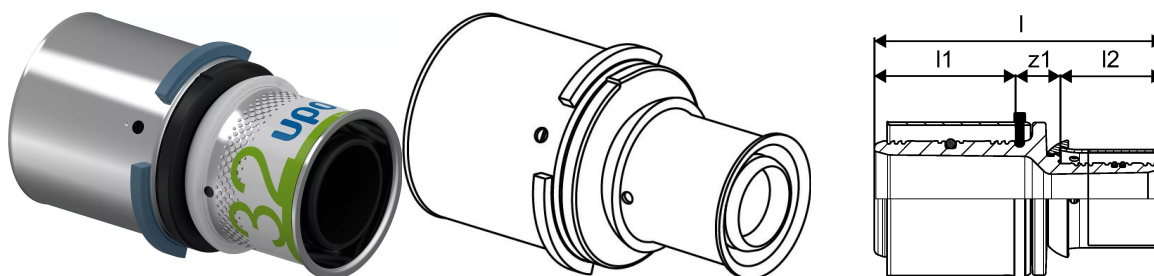

Application information Uponor S-Press reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
- AENOR

Uponor S-Press reducer PPSU 40-32

1039942

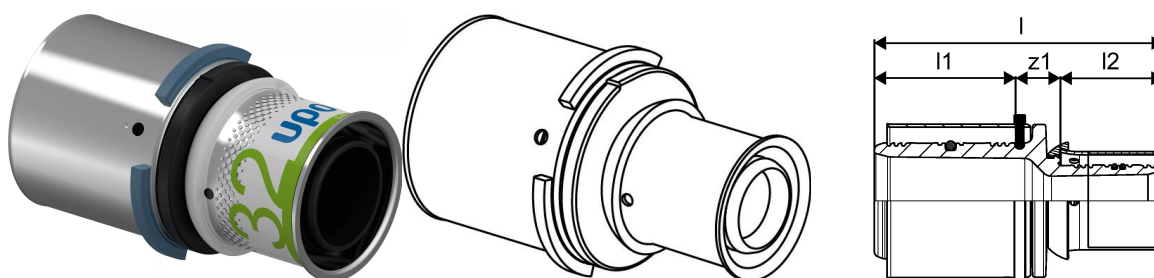

Technical data

Item no EAN	6414905228805
Item no GTIN	06414905228805
Item no VVS	087454140
RSK no.	1899408
Item no NRF	5114395
Item no LVI	1720699
Item (unit of measurement)	pce
Length (l)	80 mm
Length (l1)	39 mm
Length (l2)	28 mm
Packaging Quantity 1	5
Packaging Quantity 4	960
Packaging GTIN PL1	06414905480357
Packaging GTIN PL4	06414905480364
Item Unit Length	80
Item Unit Height	46
Item Unit Weight	0,08851
Item Unit Width	46

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com