


## Uponor S-Press PLUS tee reducer PPSU 20-16-16

1039949

- Fixed stainless steel sleeve

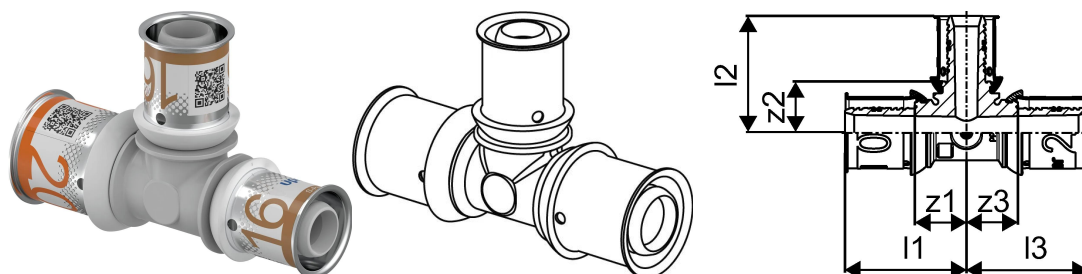

### Application information Uponor S-Press PLUS tee reducer PPSU

#### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

#### Certification


- Approvals by local OM.

E.g.

- DVGW
- AENOR

## Uponor S-Press PLUS tee reducer PPSU 20-16-16

1039949

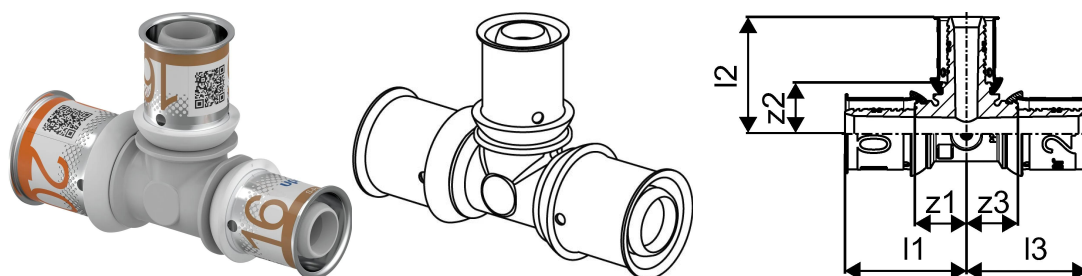

### Technical data

Item no EAN	6414905228874
Item no GTIN	06414905228874
Item no VVS	087443118
RSK no.	1807985
Item no NRF	5114403
Item no LVI	1720706
Item (unit of measurement)	pce
Length (l1)	37 mm
Length (l2)	36 mm
Length (l3)	36 mm
Z-measurement z2	16 mm
Z-measurement z3	16 mm
Packaging Quantity 1	10
Packaging Quantity 3	80
Packaging Quantity 4	3840
Packaging GTIN PL1	06414905477975
Packaging GTIN PL3	06414905635368
Packaging GTIN PL4	06414905477999
Item Unit Length	73
Item Unit Height	48
Item Unit Weight	0,03204
Item Unit Width	26

### Documents

Page with all documents

[www.uponor.com](http://www.uponor.com)