

## Uponor Radi Pipe natural in conduit red 20x2,0 28/23 50m

**1042149**

Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875


EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726

Application class 5 - high temperature radiators

Fire classification E according to DIN EN 13501-1.


Conduits manufactured from high density polyethylene

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Leakage free installations with possibility to exchange pipes in case of damage
- Operating pressure 6 bar
- Coils

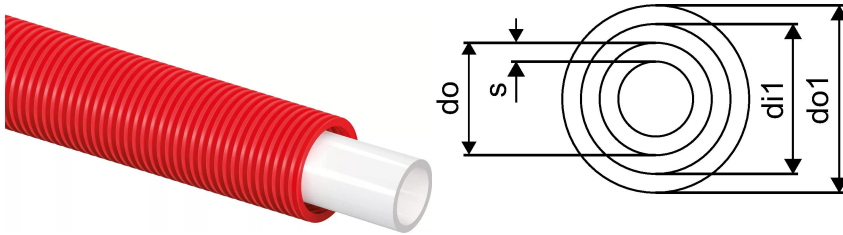

## Uponor Radi Pipe natural in conduit red 20x2,0 28/23 50m

1042149

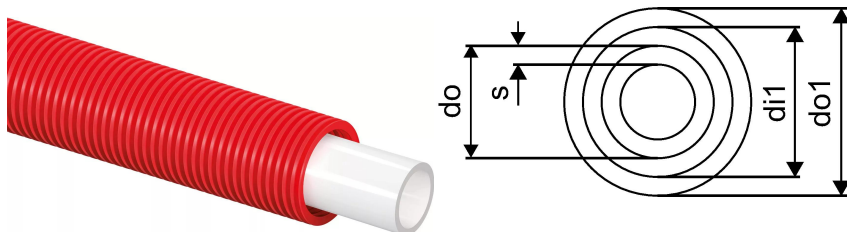

### Technical data

Item no EAN	7321500047016
Item no GTIN	07321500047016
Item (unit of measurement)	m
Packaging Quantity 1	50
Packaging Quantity 4	400
Packaging GTIN PL1	06414905267200
Packaging GTIN PL4	06414905267217
Item Unit Length	1000
Item Unit Height	28
Item Unit Weight	0,194
Item Unit Width	28

#### Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)