


Uponor Wipex jointing equal PN6 40x3,7-40x3,7

1042980

- Connection of PE-Xa or PE pipe
- 6bar, SDR 11
- DR = dezincification resistance brass

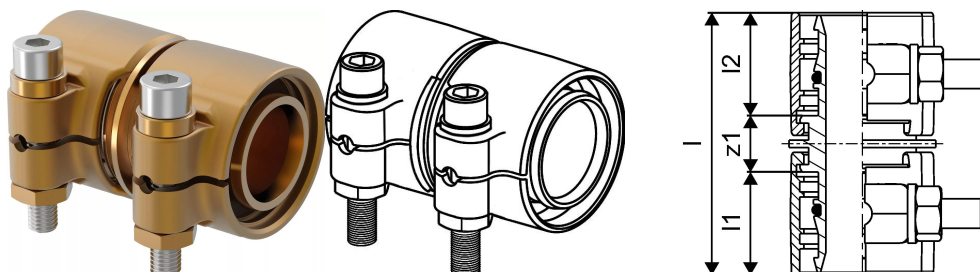

Application information Uponor Wipex jointing equal PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex jointing equal PN6 40x3,7-40x3,7

1042980

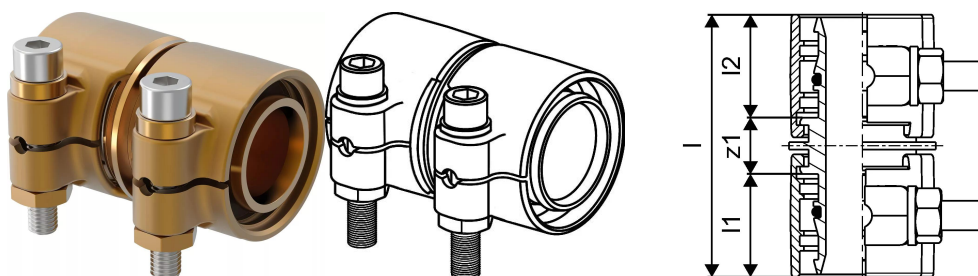

Technical data

Item no EAN	7331541200783
Item no GTIN	07331541200783
Item no VVS	087882040
RSK no.	2410695
Item no NRF	8360793
Item no LVI	1932103
Item (unit of measurement)	pce
Length (l)	71 mm
Length (l1)	29 mm
Length (l2)	29 mm
Packaging Quantity 1	1
Packaging Quantity 3	15
Packaging Quantity 4	1440
Packaging GTIN PL1	06414905400027
Packaging GTIN PL3	06414905400034
Packaging GTIN PL4	06414905400041
Item Unit Length	60
Item Unit Height	77
Item Unit Weight	0,538
Item Unit Width	46

Documents

Page with all documents

Finland

T +358 (0)20 129 211

www.uponor.com