


Uponor Wipex jointing equal PN6 63x5,8-63x5,8

1042981

- Connection of PE-Xa or PE pipe
- 6bar, SDR 11
- DR = dezincification resistance brass

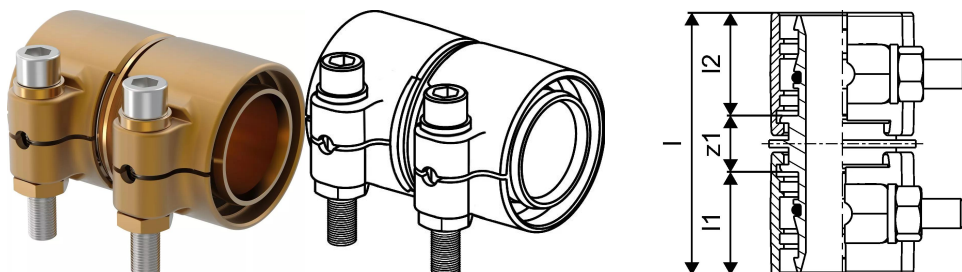

Application information Uponor Wipex jointing equal PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex jointing equal PN6 63x5,8-63x5,8

1042981

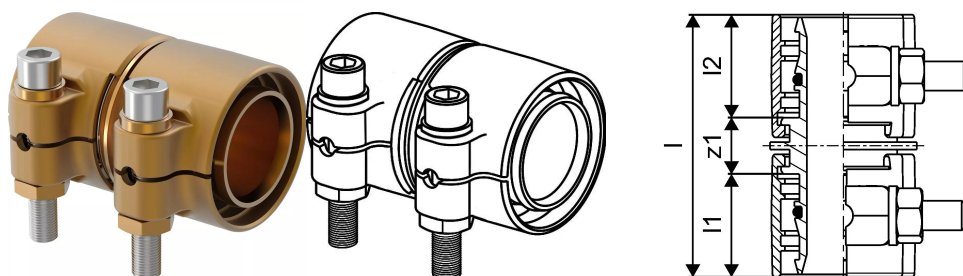

Technical data

Item no EAN	7331541200790
Item no GTIN	07331541200790
Item no VVS	087882063
RSK no.	2410697
Item no NRF	8360795
Item no LVI	1932105
Item (unit of measurement)	pce
Length (l)	105 mm
Length (l1)	46 mm
Length (l2)	46 mm
Packaging Quantity 1	1
Packaging Quantity 3	5
Packaging Quantity 4	300
Packaging GTIN PL1	06414905400058
Packaging GTIN PL3	06414905400065
Packaging GTIN PL4	06414905400072
Item Unit Length	85
Item Unit Height	110
Item Unit Weight	1,501
Item Unit Width	77

Documents

Page with all documents

Finland

T +358 (0)20 129 211

www.uponor.com