


## Uponor Wipex jointing equal PN10 63x8,6-63x8,6

**1042982**

- Connection of PE-Xa or PE pipe
- 10 bar, SDR 7,4
- DR = dezincification resistance brass

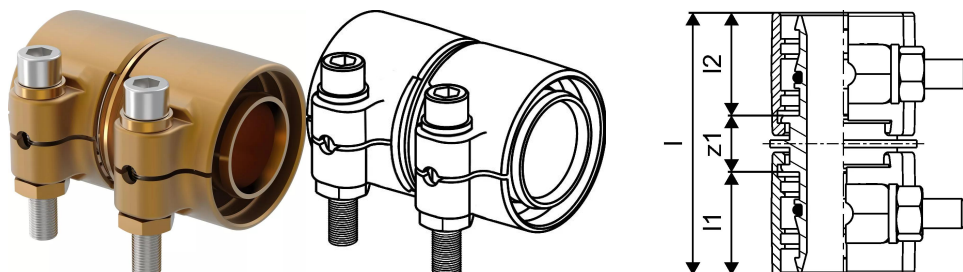

### Application information Uponor Wipex jointing equal PN10

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

## Uponor Wipex jointing equal PN10 63x8,6-63x8,6

1042982

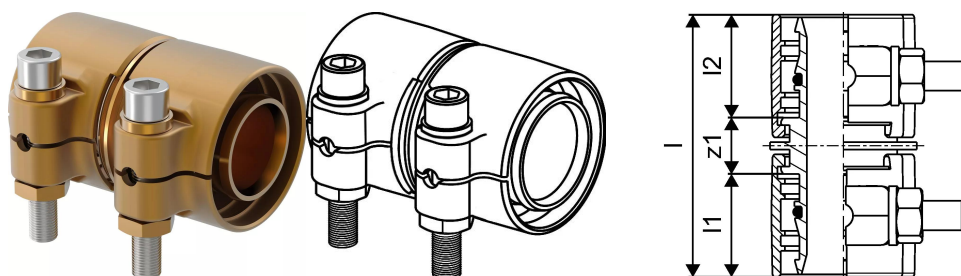

### Technical data

Item no EAN	7331541200806
Item no GTIN	07331541200806
Item no VVS	087882163
RSK no.	2410692
Item no NRF	8360785
Item no LVI	1932112
Item (unit of measurement)	pce
Length (l)	106 mm
Length (l1)	47 mm
Length (l2)	46 mm
Packaging Quantity 1	1
Packaging Quantity 3	4
Packaging Quantity 4	300
Packaging GTIN PL1	06414905400089
Packaging GTIN PL3	06414905400096
Packaging GTIN PL4	06414905400102
Item Unit Length	90
Item Unit Height	107
Item Unit Weight	1,546
Item Unit Width	67

### Documents

Page with all documents



Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)