


Uponor Wipex jointing equal PN10 50x6,9-50x6,9

1042983

- Connection of PE-Xa or PE pipe
- 10 bar, SDR 7,4
- DR = dezincification resistance brass

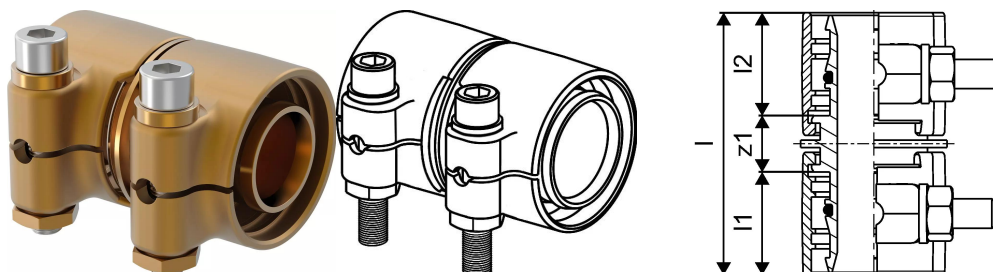

Application information Uponor Wipex jointing equal PN10

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex jointing equal PN10 50x6,9-50x6,9

1042983

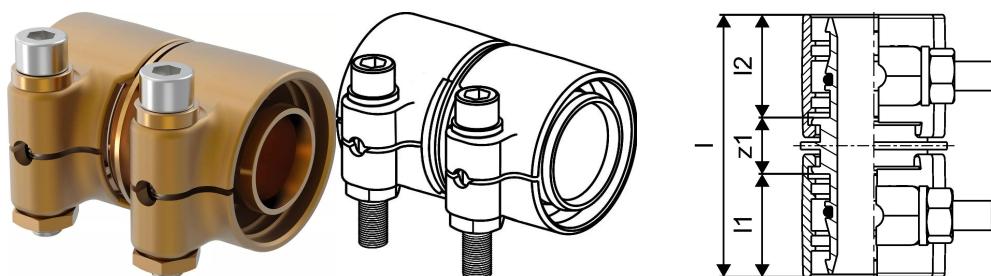

Technical data

Item no EAN	7331541200813
Item no GTIN	07331541200813
Item no VVS	087882150
RSK no.	2410691
Item no NRF	8360784
Item no LVI	1932111
Item (unit of measurement)	pce
Length (l)	86 mm
Length (l1)	37 mm
Length (l2)	36 mm
Packaging Quantity 1	1
Packaging Quantity 3	10
Packaging Quantity 4	600
Packaging GTIN PL1	06414905400119
Packaging GTIN PL3	06414905400126
Packaging GTIN PL4	06414905400133
Item Unit Length	74
Item Unit Height	82
Item Unit Weight	0,935
Item Unit Width	55

Documents

Page with all documents

Finland

T +358 (0)20 129 211

www.uponor.com