


Uponor Wipex jointing equal PN6 75x6,8-75x6,8

1042985

- Connection of PE-Xa or PE pipe
- 6bar, SDR 11
- DR = dezincification resistance brass

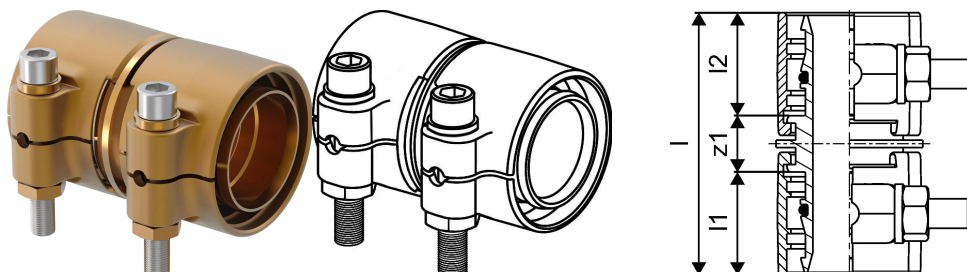

Application information Uponor Wipex jointing equal PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

Certification

- Approvals should be checked by local responsible person

Uponor Wipex jointing equal PN6 75x6,8-75x6,8

1042985

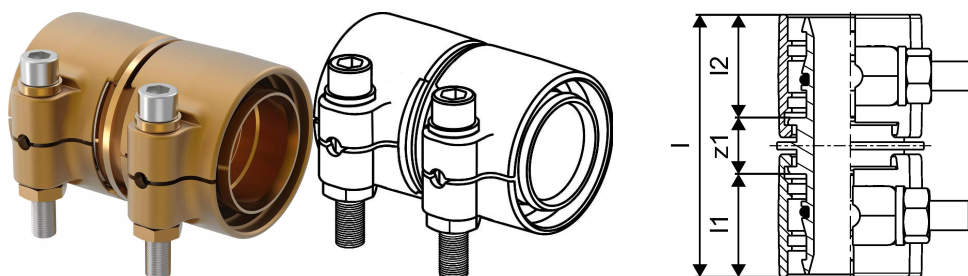

Technical data

Item no EAN	7331541200837
Item no GTIN	07331541200837
Item no VVS	087882075
RSK no.	2410698
Item no NRF	8360796
Item no LVI	1932106
Item (unit of measurement)	pce
Length (l)	123 mm
Length (l1)	51 mm
Length (l2)	51 mm
Packaging Quantity 1	1
Packaging Quantity 3	3
Packaging Quantity 4	240
Packaging GTIN PL1	06414905400171
Packaging GTIN PL3	06414905400188
Packaging GTIN PL4	06414905400195
Item Unit Length	125
Item Unit Height	100
Item Unit Weight	2,331
Item Unit Width	100

Documents

Page with all documents

Finland

T +358 (0)20 129 211

www.uponor.com