


Uponor Ecoflex Aqua Twin 50x6,9-40x5,5/200

1044016

- Warm tap water with circulation
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

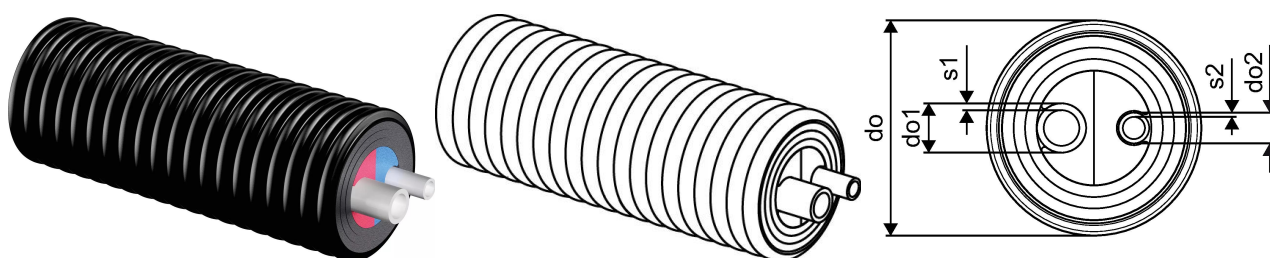

Application information Uponor Ecoflex Aqua Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

Uponor Ecoflex Aqua Twin 50x6,9-40x5,5/200

1044016

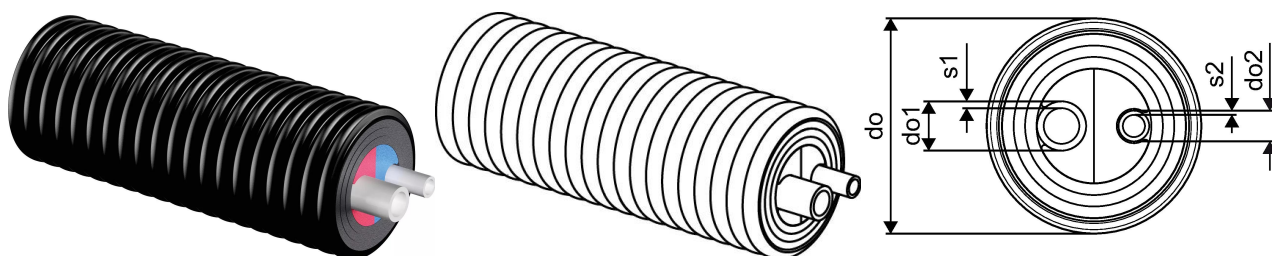

Technical data

Item no EAN	6414905212811
Item no GTIN	06414905212811
Item no VVS	087363350
Item no LVI	3010156
Item (unit of measurement)	m
Bending radius 2	1 m
Packaging Quantity 1	100
Packaging GTIN PL1	06414905458981
Item Unit Length	1000
Item Unit Height	200
Item Unit Weight	3,5
Item Unit Width	200

Documents

Page with all documents

Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com