


Uponor Ecoflex Quattro 2x32x2,9-2x32x4,4/175

1044018

- Heating and warm tap water with circulation
- Four medium pipe PE-Xa, SDR 11 and 7,4
- Max. load 6 bar heating / 10 bar tap water / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion between the lines

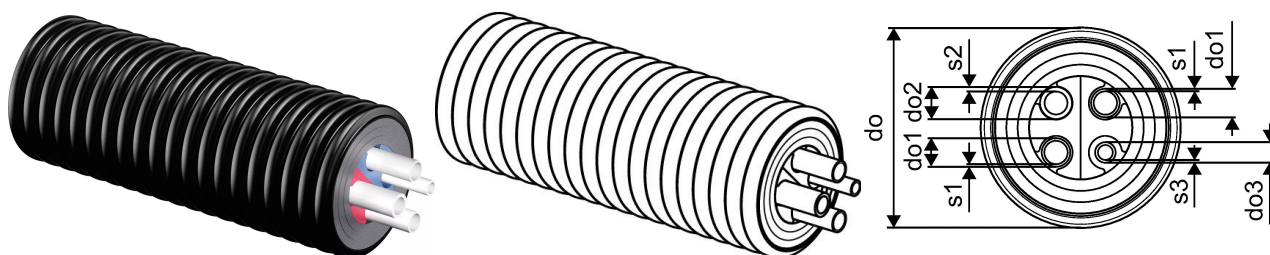

Application information Uponor Ecoflex Quattro

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Medium pipe: Cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 6 (SDR 11) and PN10 (SDR 7,4), Oxygen tightness based on EN 15632 for heating pipes
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of heating and warm tap water for buried installations.
- Heating operating temperature 80°C based on EN 15632
- Tap water operating temperature 70°C based on EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Quattro 2x32x2,9-2x32x4,4/175

1044018

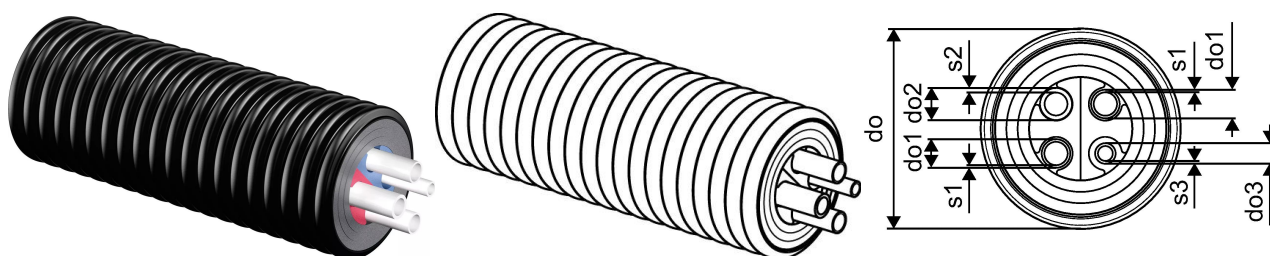

Technical data

Item no EAN	6414905221455
Item no GTIN	06414905221455
Item no VVS	087817570
Item no LVI	3010340
Item (unit of measurement)	m
Bending radius 2	0,8 m
Wall thickness s3	4,4 mm
Packaging Quantity 1	200
Packaging GTIN PL1	06414905459001
Item Unit Length	1000
Item Unit Height	175
Item Unit Weight	2,9
Item Unit Width	175

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com