


Uponor S-Press elbow PPSU 40-40

1046386

- Fast installation with easy bevel and without calibration
- Colour code

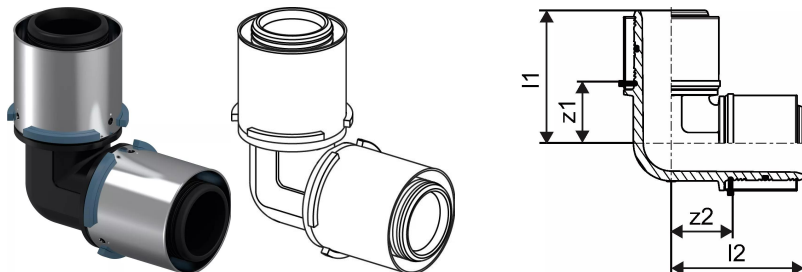

Application information Uponor S-Press elbow PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press elbow PPSU 40-40

1046386

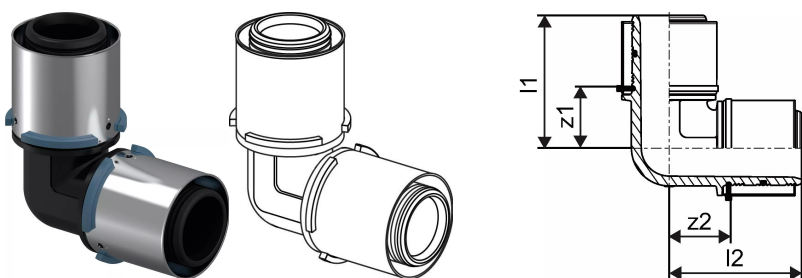

Technical data

Item no EAN	4021598112605
Item no GTIN	04021598112605
Item no VVS	087430140
RSK no.	1877960
Item no NRF	5071974
Item no LVI	1721268
Item (unit of measurement)	pce
Length (l1)	68 mm
Length (l2)	68 mm
Z-measurement z2	29 mm
Packaging Quantity 1	5
Packaging Quantity 4	960
Packaging GTIN PL1	06414905287499
Packaging GTIN PL4	06414905287505
Item Unit Length	84
Item Unit Height	42
Item Unit Weight	0,136
Item Unit Width	84

Documents

Page with all documents



Uponor Corporation

Ilmalantori 4
00240, Helsinki
Finland

T +358 (0)20 129 211

www.uponor.com