


## Uponor S-Press elbow 45deg PPSU 40-40

1046388

- Fast installation with easy bevel and without calibration
- Colour code

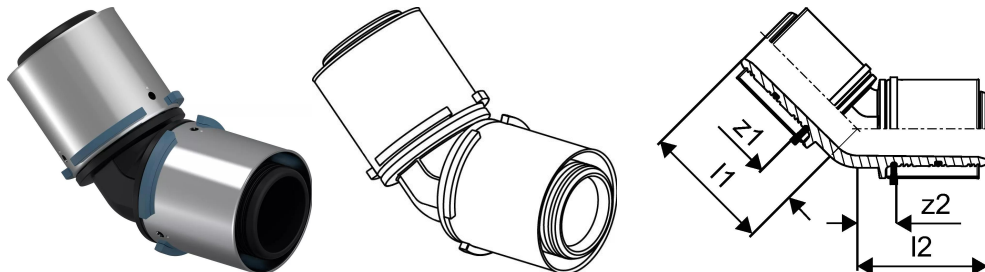

### Application information Uponor S-Press elbow 45deg PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.  
E.g.
  - DVGW
  - AENOR

## Uponor S-Press elbow 45deg PPSU 40-40

1046388

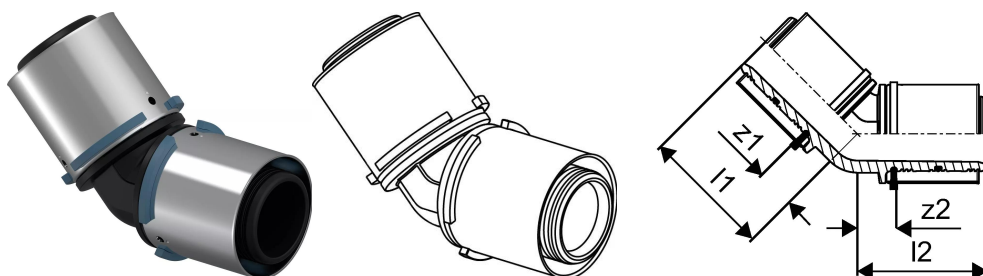

### Technical data

Item no EAN	4021598112629
Item no GTIN	04021598112629
Item no VVS	087433140
RSK no.	1877962
Item no NRF	5071977
Item no LVI	1721056
Item (unit of measurement)	pce
Length (l1)	56 mm
Length (l2)	56 mm
Z-measurement z2	17 mm
Packaging Quantity 1	5
Packaging Quantity 4	960
Packaging GTIN PL1	06414905287536
Packaging GTIN PL4	06414905287543
Item Unit Length	64
Item Unit Height	47
Item Unit Weight	0,123
Item Unit Width	64

### Documents

Page with all documents

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)