


Uponor S-Press tee PPSU 40-40-40

1046390

- Fast installation with easy bevel and without calibration
- Colour code

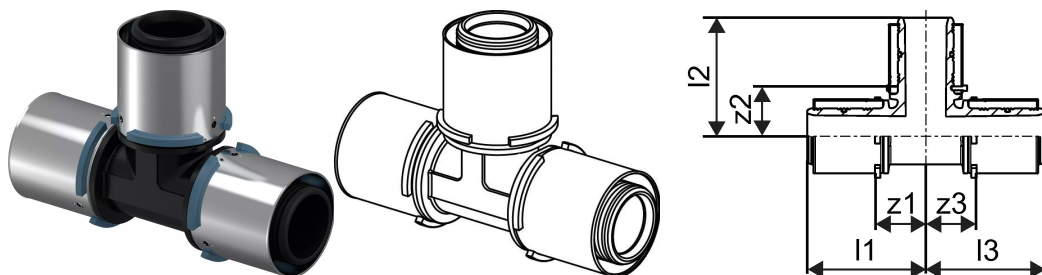

Application information Uponor S-Press tee PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee PPSU 40-40-40

1046390

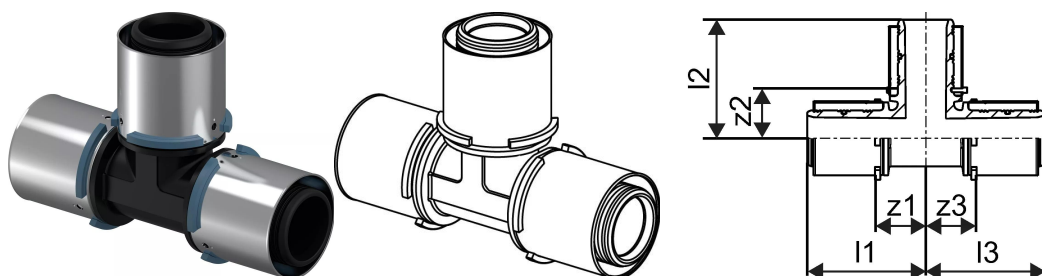

Technical data

Item no EAN	4021598112643
Item no GTIN	04021598112643
Item no VVS	087440140
RSK no.	1877964
Item no NRF	5071979
Item no LVI	1722248
Item (unit of measurement)	pce
Length (l1)	68 mm
Length (l2)	68 mm
Length (l3)	68 mm
Z-measurement z2	29 mm
Z-measurement z3	29 mm
Packaging Quantity 1	5
Packaging Quantity 4	720
Packaging GTIN PL1	06414905287703
Packaging GTIN PL4	06414905287710
Item Unit Length	135
Item Unit Height	85
Item Unit Weight	0,19
Item Unit Width	43

Documents

Page with all documents

Finland

T +358 (0)20 129 211

www.uponor.com