


Uponor S-Press tee reducer PPSU 50-40-50

1046400

- Fast installation with easy bevel and without calibration
- Colour code

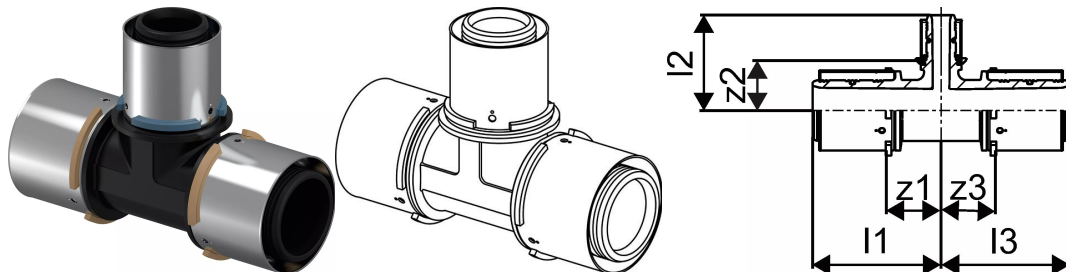

Application information Uponor S-Press tee reducer PPSU

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

Certification

- Approvals by local OM.
- E.g.
- DVGW
 - AENOR

Uponor S-Press tee reducer PPSU 50-40-50

1046400

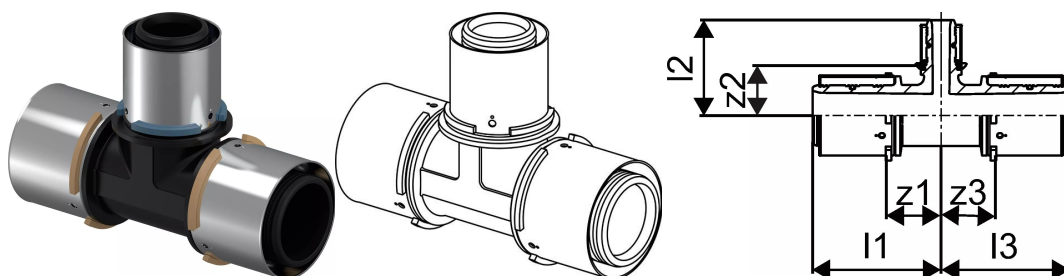

Technical data

Item no EAN	4021598112742
Item no GTIN	04021598112742
Item no VVS	087442150
RSK no.	1877974
Item no NRF	5072015
Item no LVI	1722258
Item (unit of measurement)	pce
Length (l1)	73 mm
Length (l2)	73 mm
Length (l3)	73 mm
Z-measurement z2	33 mm
Z-measurement z3	33 mm
Packaging Quantity 1	3
Packaging Quantity 4	288
Packaging GTIN PL1	06414905287666
Packaging GTIN PL4	06414905287673
Item Unit Length	143
Item Unit Height	90
Item Unit Weight	0,26
Item Unit Width	53

Documents

Page with all documents

Finland

T +358 (0)20 129 211

www.uponor.com