


## Uponor S-Press reducer PPSU 50-40

**1046406**

- Fast installation with easy bevel and without calibration
- Colour code

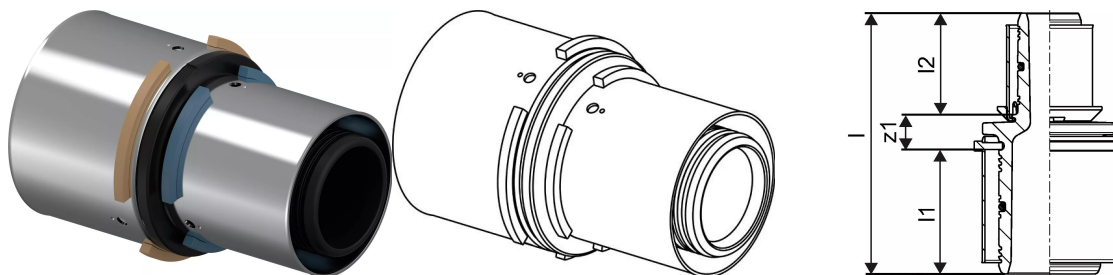

### Application information Uponor S-Press reducer PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.
- E.g.
- DVGW
  - AENOR

## Uponor S-Press reducer PPSU 50-40

1046406

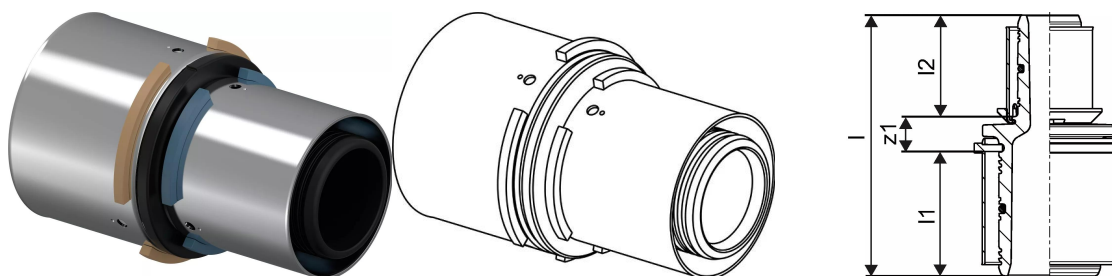

### Technical data

Item no EAN	4021598112803
Item no GTIN	04021598112803
Item no VVS	087454150
RSK no.	1877980
Item no NRF	5072022
Item no LVI	1722725
Item (unit of measurement)	pce
Length (l)	91 mm
Length (l1)	39 mm
Length (l2)	39 mm
Packaging Quantity 1	3
Packaging Quantity 4	576
Packaging GTIN PL1	06414905287642
Packaging GTIN PL4	06414905287659
Item Unit Length	87
Item Unit Height	57
Item Unit Weight	0,13
Item Unit Width	57

### Documents

Page with all documents

Uponor Corporation

Ilmalantori 4  
00240, Helsinki  
Finland

T +358 (0)20 129 211

[www.uponor.com](http://www.uponor.com)